

## CS64US

4-Port USB VGA/Audio Cable KVM Switch (0.9m, 1.2m)



The CS64US takes a giant step forward from prior cable KVM models, by offering built-in cables, USB peripheral sharing, and a firmware upgrade function that allows you to keep up with latest available versions.

Furthermore, the CS64US features enhanced Video DynaSync™ technology, which stores the console monitor's EDID (Extended Display Identification Data) to optimize display resolution. The CS64US also offers multiplatform support and computer selection via hotkeys to provide the ultimate in desktop convenience.

### Features


- One USB console controls four USB computers
- Compact design, built-in 0.9/1.2 m cables
- Hotkey selection for OS and keyboard language
- Computer Selection via hotkey
- Multiplatform support – Windows, Linux, Mac, and Sun
- Video DynaSync™ – exclusive ATEN technology eliminates boot-up display problems and optimizes resolution when switching between ports
- USB mouse port can be used for USB 1.1 hub and USB 1.1 peripheral sharing
- Supports multifunction and wireless keyboards and mice
- All-in-one design
- With speaker support
- Superior video quality – up to 2048 x 1536 @ 60 Hz ; DDC2B
- Auto Scan function to monitor computer operation
- Bus-powered
- Sun/Mac keyboard support and emulation\*
- Firmware upgradable

- \* 1. PC keyboard combinations emulate Sun/Mac keyboards
- 2. Sun/Mac keyboards only work with their own computers

## Specifications

|                        |                                                                                                                                                                                                                                                  |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Computer Connections   | 4                                                                                                                                                                                                                                                |
| Port Selection         | Hotkey                                                                                                                                                                                                                                           |
| Connectors             |                                                                                                                                                                                                                                                  |
| Console Ports          | 1 x HDB-15 Female (Blue)<br>2 x USB Type A Female<br>1 x 3.5mm Audio Jack Female (Green)                                                                                                                                                         |
| KVM Ports              | 4 x HDB-15 Male (Blue)<br>4 x USB Type A Male<br>4 x 3.5mm Audio Jack Male (Green)                                                                                                                                                               |
| LEDs                   |                                                                                                                                                                                                                                                  |
| Selected               | 4 (Green)                                                                                                                                                                                                                                        |
| Cable Length           |                                                                                                                                                                                                                                                  |
| Computer               | 2 x 0.9 m; 2 x 1.2 m                                                                                                                                                                                                                             |
| Emulation              |                                                                                                                                                                                                                                                  |
| Keyboard / Mouse       | USB                                                                                                                                                                                                                                              |
| Video                  | 2048 x 1536; DDC2B                                                                                                                                                                                                                               |
| Scan Interval          | 1-99 secs. (default 5 secs.)                                                                                                                                                                                                                     |
| Power Consumption      | DC5V:0.9W:8BTU/h<br><br>Note:<br>● The measurement in Watts indicates the typical power consumption of the device with no external loading.<br>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. |
| Environmental          |                                                                                                                                                                                                                                                  |
| Operating Temperature  | 0 - 50°C                                                                                                                                                                                                                                         |
| Storage Temperature    | -20 - 60°C                                                                                                                                                                                                                                       |
| Humidity               | 0-80% RH, Non-condensing                                                                                                                                                                                                                         |
| Physical Properties    |                                                                                                                                                                                                                                                  |
| Housing                | Plastic                                                                                                                                                                                                                                          |
| Weight                 | 0.58 kg ( 1.28 lb )                                                                                                                                                                                                                              |
| Dimensions (L x W x H) | 9.41 x 9.72 x 2.60 cm<br>(3.7 x 3.83 x 1.02 in.)                                                                                                                                                                                                 |
| Note                   | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.                                                                                                                  |

Diagram

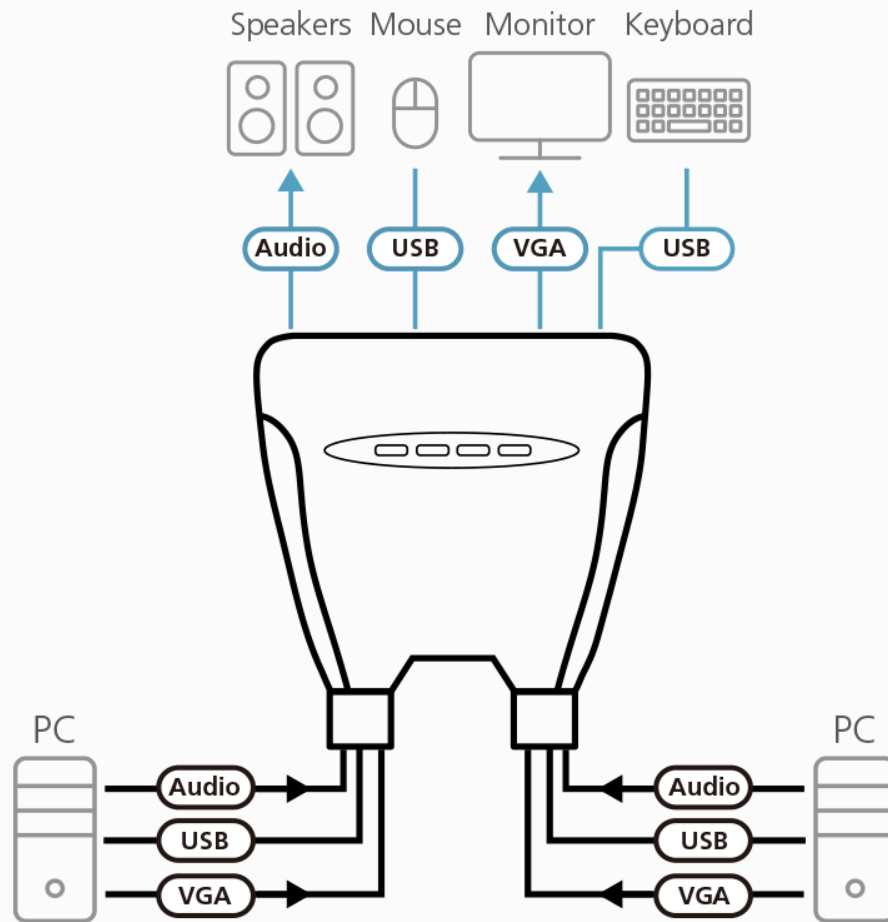

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their  
 respective owners.