

## KL3116

16-Port Dual Rail LCD KVM Switch



We understand that space in your data center is limited. That's why we've created the KL3116 LCD KVM Switch, a keyboard, video, and mouse (KVM) switch that offers secure access to 16 attached computers and mounts in only 1U of rack space. It features independently retractable 17" LCD monitor and keyboard with built-in touchpad. To maximize space in your data center the keyboard "hides away" when not in use, while the thin profile LCD monitor provides continuous monitoring of computers.




## Features

- Integrated KVM console with 17" LCD monitor in a Hideaway™ housing
- Space saving technology - up to two consoles (one bus) control up to 16 computers
- Extra console port - manage computers in the LCD KVM switch from an external console (monitor, USB keyboard, and USB mouse)
- OSD tree structure makes finding and managing computers easy
- Dual interface - supports PS/2 and USB keyboards and mice in the computer ports
- Hideaway™ housing is slightly less than 1U with top and bottom clearance for smooth operation in 1U of rack space
- Dual slide - LCD monitor slides independently of the keyboard/touchpad
- LCD module rotates up to 120 degrees for a more comfortable viewing angle
- Supports external PS/2 mouse
- USB peripheral support for attached computers
- Conveniently located station and port selectors with 7-segment LED displays to quickly switch to target computers
- Dedicated Hotkey Mode and OSD Invocation Keys reduce the number of keystrokes and provide quick access to these functions
- Daisy chain up to 31 additional KVM switches to control up to 512 computers
- Auto Scan Mode enables continuous monitoring of user-selected computers
- Security - Administrator/User password authorization for enhanced security protection; Administrator access rights synchronized between first and chained stations
- Two-level password security - only authorized users can view and control computers
- Supports one Administrator and four User accounts with separate profiles
- Superior video quality - supports resolutions up to 1280 x 1024 @ 75Hz
- Super A-Grade TFT LCD Panel; [Zero Dead Pixel Guarantee](#)
- Multiplatform support: Windows 2000/XP/Vista, Linux, Mac, Unix, Sun and FreeBSD.
- For more information about KVMs which can connect to KL3116, see [Compatible KVM Table](#)
- Single person Installation (optional)

|  |              |
|--|--------------|
| Rack Mounting Kit                        | Depth        |
| <a href="#">2X-010G</a> (Long/Optional)  | 68cm - 105cm |
| Short (Standard)                         | 42cm - 77cm  |
|  |              |
| Easy Installation<br>Rack Mounting Kit   | Depth        |
| <a href="#">2X-012G</a> (Long/Optional)  | 68cm - 105cm |
| <a href="#">2X-011G</a> (Short/Optional) | 57cm - 70cm  |

[More information about "Easy Rack Mounting"...](#)

Diagram

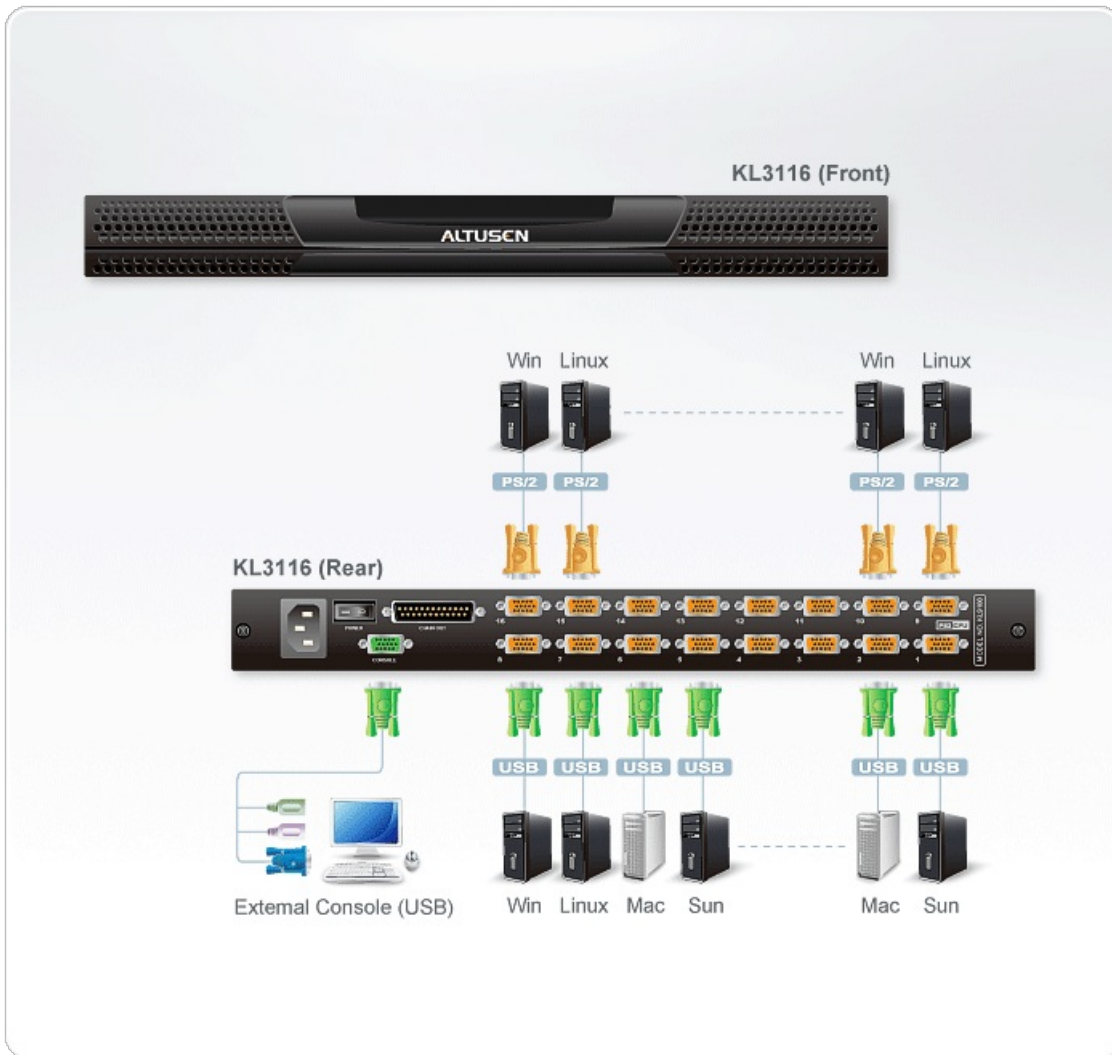

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their  
 respective owners.