


## VC925

DisplayPort to VGA Adapter



## DisplayPort to VGA Adapter

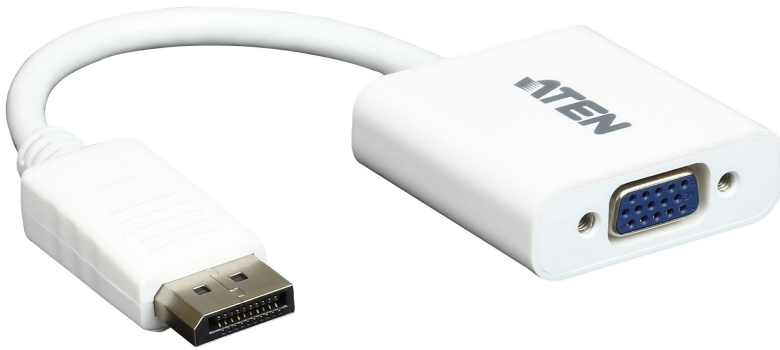

DisplayPort Input  
DisplayPort 1.2a compliant

VGA Output


**Plug-n-Play**

No installation software or drivers required. The VC925 is the perfect solution for connecting DisplayPort inputs to VGA output displays.

**Superior Video Resolution**

Supports VGA, SVGA, XGA, SXGA, UXGA, and resolutions up to 1920 x 1200 and 1080p, making it highly compatible across devices.



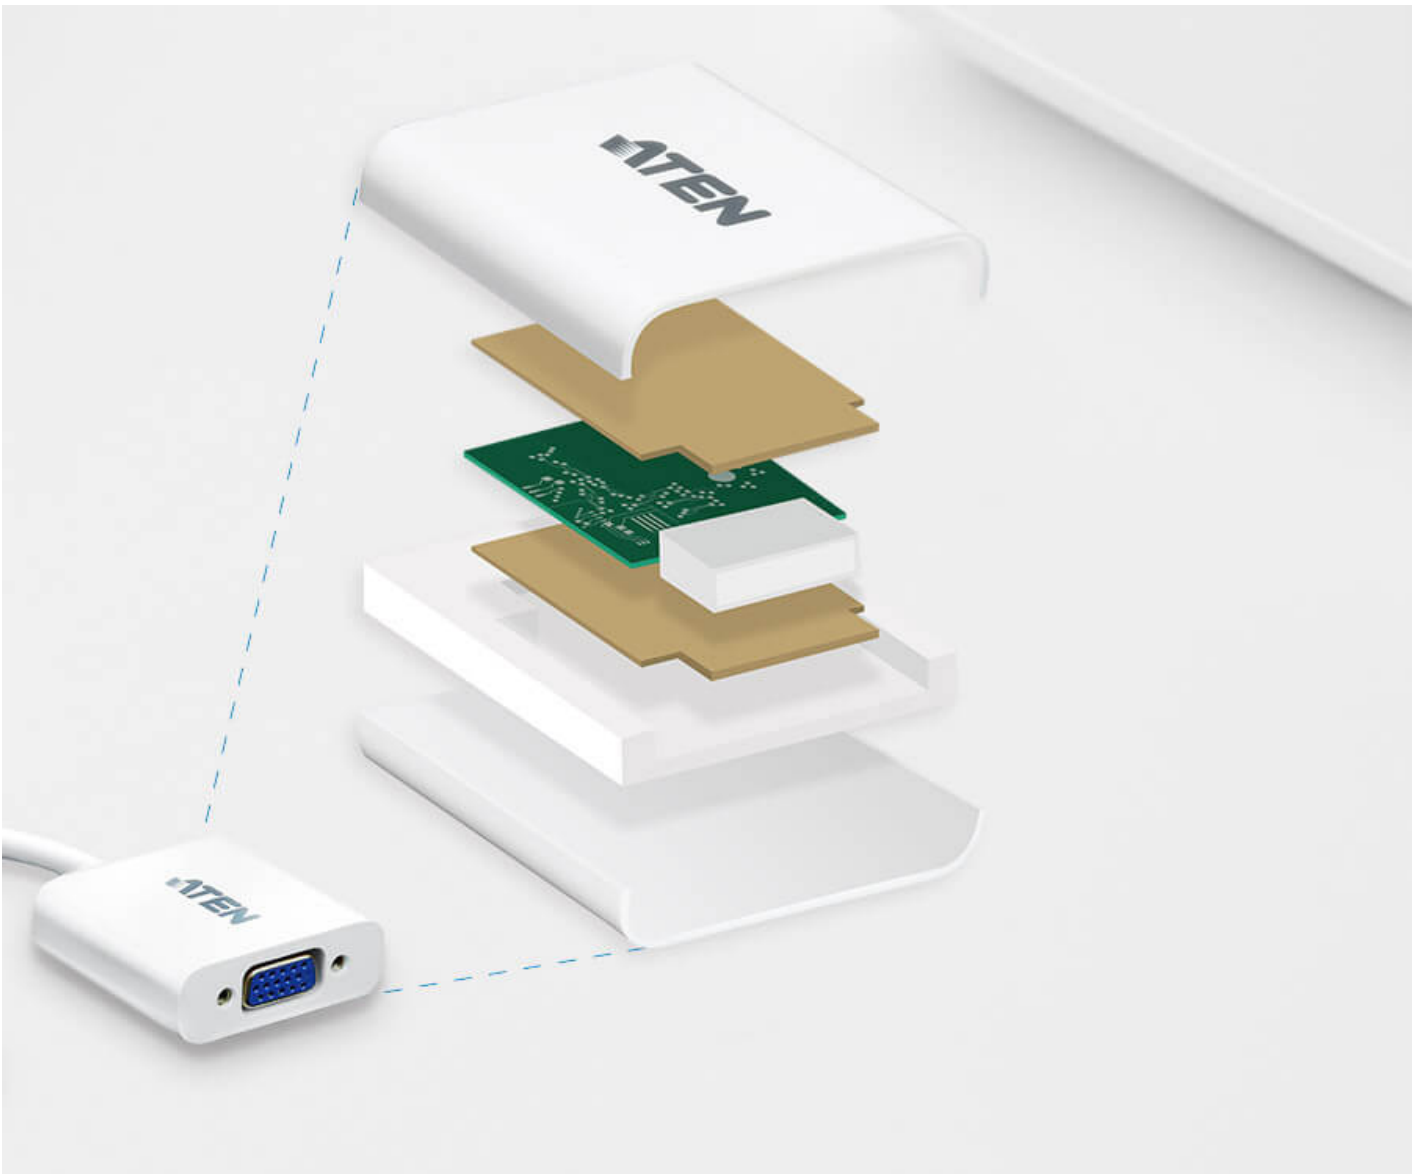

#### Superior Signal Quality

The internal copper foil shielding protection ensures signal integrity and minimizes external interference, giving you extra reliable and superior quality signals.

**Resolution**  
1920 x 1200, 1080P



**Video In**  
**DisplayPort**



#### Features


The VC925 is a DisplayPort to VGA adapter, allowing you to connect your device's DisplayPort output to the VGA input of a TV or other display.

The VC925 provide a cost-effective yet high performance signal conversion solution. This adapter is therefore perfect for computers and notebooks, supporting display resolutions of up to WUXGA (1920x1200@60Hz).

- Converts DisplayPort signals to VGA output
- DisplayPort 1.2 compliant
- Supports VGA, SVGA, XGA, SXGA, UXGA and resolutions up to 1920x1200 (PC) / 1080p (HDTV)
- No software or driver installation required

## Specification

|                        |                                                                                                                                 |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Video Input            |                                                                                                                                 |
| Interfaces             | 1 x DisplayPort Male (White)                                                                                                    |
| Video Output           |                                                                                                                                 |
| Interfaces             | 1 x HDB-15 Female (Blue)                                                                                                        |
| Video                  |                                                                                                                                 |
| Max. Pixel Clock       | 165 MHz                                                                                                                         |
| Max. Resolution        | Input up to 4096 x 2160@60Hz (4:4:4)<br>Output up to 1920 x 1200                                                                |
| Compliance             | DP1.2                                                                                                                           |
| Environmental          |                                                                                                                                 |
| Operating Temperature  | 0 - 50 °C                                                                                                                       |
| Storage Temperature    | -20 - 60 °C                                                                                                                     |
| Humidity               | 0 - 80% RH, Non-Condensing                                                                                                      |
| Physical Properties    |                                                                                                                                 |
| Housing                | Plastic                                                                                                                         |
| Weight                 | 0.04 kg ( 0.1 lb )                                                                                                              |
| Dimensions (L x W x H) | 18.00 x 4.50 x 1.50 cm<br>(7.09 x 1.77 x 0.59 in.)                                                                              |
| Carton Lot             | 40 pcs                                                                                                                          |
| Note                   | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |

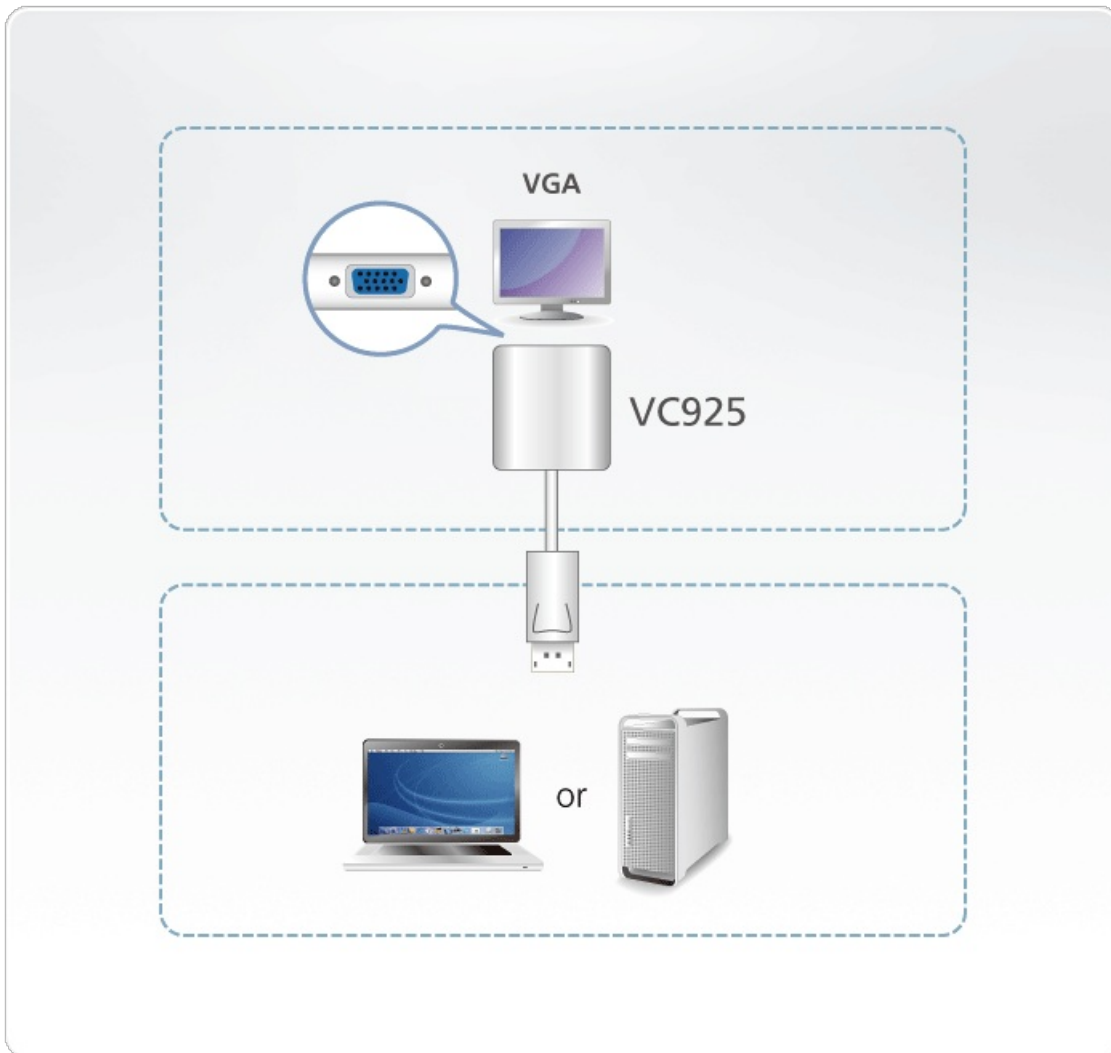**Diagram****ATEN International Co., Ltd.**

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan

Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their  
respective owners.