

## PE0209S

Basic 1U PDU with surge protection

PE0209SG



The Aten's PE0209S, a 9-outlet, 1U rack mount power distribution unit (PDU), provides IEC and NEMA output. It distributes power to 9 receptacles from a single plug with unfiltered electrical pass-through. The PE0209S also provides surge protection, prevents damage to your equipment from power surges and spikes. The integrated surge protector includes a LED indicator, letting you know the status of your equipment.

Note: The warranty does not cover any accessories external to the product like the surge protection module.


### Features

- Space saving – 1U rack mount design
- IEC or NEMA outlet models
- Surge Protection
- Aluminum material
- Works with data centers, server rooms and telecom equipment

# Specification

|                                    |                                                                                                                                                                      |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Electrical                         |                                                                                                                                                                      |
| Nominal Input Voltage              | 100-240 VAC                                                                                                                                                          |
| Maximum Input Current              | 16A (Max)                                                                                                                                                            |
| Input Frequency                    | 50-60 Hz                                                                                                                                                             |
| Input Connection                   | For G Plug: IEC-320 C20<br>For Z Plug: Chinese 16A                                                                                                                   |
| Input Power                        | 3680VA(Max)                                                                                                                                                          |
| Outlet Type                        | (8)IEC C13+(1)IEC C19                                                                                                                                                |
| Maximum Output Current (Outlet)    | IEC C13:10A Max<br>IEC C19:16A Max                                                                                                                                   |
| Maximum Output Current (Bank)      | 16A (Max)                                                                                                                                                            |
| Maximum Output Current (Total)     | 16A (Max)                                                                                                                                                            |
| OPD(Overcurrent Protection Device) | Yes                                                                                                                                                                  |
| Physical Properties                |                                                                                                                                                                      |
| Dimensions (L x W x H)             | 48.20 x 4.44 x 4.50 cm<br>(18.98 x 1.75 x 1.77 in.)                                                                                                                  |
| Weight                             | 0.67 kg ( 1.48 lb )                                                                                                                                                  |
| Power Cord Length                  | 10ft(3×2.5mm2)                                                                                                                                                       |
| Environmental                      |                                                                                                                                                                      |
| Temperature (Operating / Storage)  | 0 – 40°C / -20 – 60°C<br>*When the environmental temperature comes close 40 degrees, it is recommended to lower the load to 60% to comply to the safety regulations. |
| Elevation (Operating / Storage)    | 3000m                                                                                                                                                                |
| Compliance                         |                                                                                                                                                                      |
| EMC Verification                   | -                                                                                                                                                                    |
| Safety Verification                | LVD                                                                                                                                                                  |
| Note                               | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.                                      |

Diagram

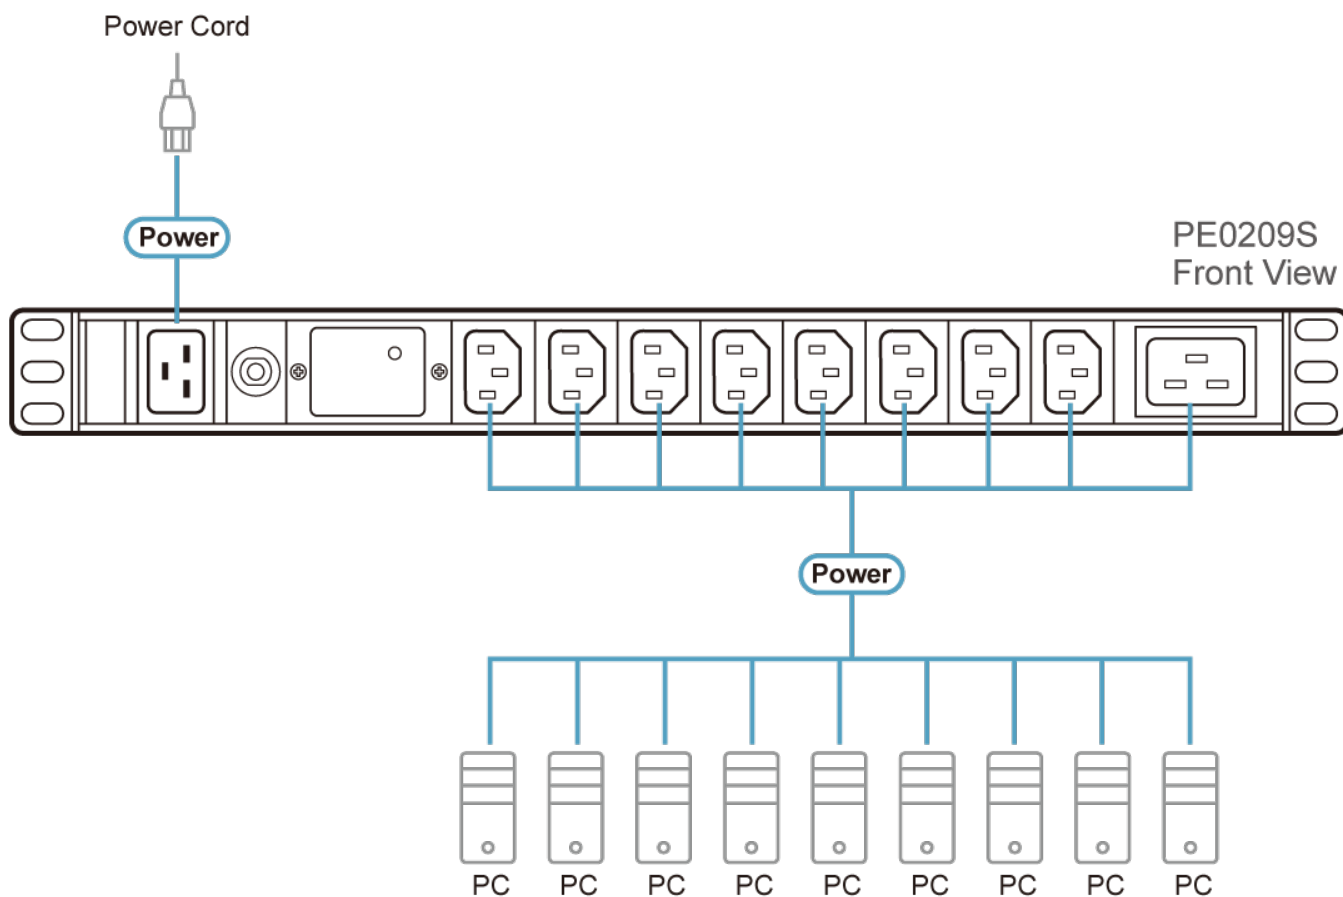

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.