

## UCE260

USB 2.0 Cat 5 Extender (up to 60m)



UCE260 can easily send the USB signals via Ethernet Cable up to 60 meters (196 ft) at data rate of High Speed (480Mb/s) , Full Speed (12Mb/s) and Low Speed (1.5Mb/s). Without any configuration or software driver, this USB extender allows you to extend your USB device or hub up to 60m from your computer, which overcomes the typical USB cable limitation.




### Features

- Supports any High-Speed (480Mb/s), full-speed (12 Mb/s) or low-speed (1.5 Mb/s) USB devices
- Extends signal transmission distance of a USB devices up to 60m via a Ethernet Cable
- Includes an AC adapter to stabilize power supply
- Hot-Pluggable
- The most cost-effective USB extender solution
- No additional software driver required

# Specification

| Function               | Local Unit                                                                                                                                                                                                                                        | Remote Unit                                                                                                                                                                                                                                        |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Connectors             |                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                    |
| USB Port               | 1 x USB Type A Male                                                                                                                                                                                                                               | 1 x USB Type A Female                                                                                                                                                                                                                              |
| Link                   | 1 x RJ45 Female                                                                                                                                                                                                                                   | 1 x RJ45 Female                                                                                                                                                                                                                                    |
| Power                  | N/A                                                                                                                                                                                                                                               | 1 x DC Power Jack                                                                                                                                                                                                                                  |
| USB Specification      | 2.0 For High / Full / Low Speed                                                                                                                                                                                                                   | 2.0 For High / Full / Low Speed                                                                                                                                                                                                                    |
| USB Devices Supported  | N/A                                                                                                                                                                                                                                               | 1 Device<br>【Note】 Please verify the compatibility of the USB video device with the manufacturer.                                                                                                                                                  |
| Power Consumption      | DC5V:0.65W:3BTU/h<br><br>Note:<br>● The measurement in Watts indicates the typical power consumption of the device with no external loading.<br>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. | DC5V:0.95W:15BTU/h<br><br>Note:<br>● The measurement in Watts indicates the typical power consumption of the device with no external loading.<br>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. |
| Environmental          |                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                    |
| Operating Temperature  | 0–40°C                                                                                                                                                                                                                                            | 0–40°C                                                                                                                                                                                                                                             |
| Storage Temperature    | -20–60°C                                                                                                                                                                                                                                          | -20–60°C                                                                                                                                                                                                                                           |
| Humidity               | 0–80% RH, Non-condensing                                                                                                                                                                                                                          | 0–80% RH, Non-condensing                                                                                                                                                                                                                           |
| Physical Properties    |                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                    |
| Housing                | Plastic                                                                                                                                                                                                                                           | Plastic                                                                                                                                                                                                                                            |
| Weight                 | 0.04 kg ( 0.09 lb )                                                                                                                                                                                                                               | 0.02 kg ( 0.05 lb )                                                                                                                                                                                                                                |
| Dimensions (L x W x H) | 6.30 x 3.10 x 2.19 cm<br>(2.48 x 1.22 x 0.86 in.)                                                                                                                                                                                                 | 6.30 x 3.10 x 2.19 cm<br>(2.48 x 1.22 x 0.86 in.)                                                                                                                                                                                                  |
| Note                   | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.                                                                                                                   |                                                                                                                                                                                                                                                    |

Diagram

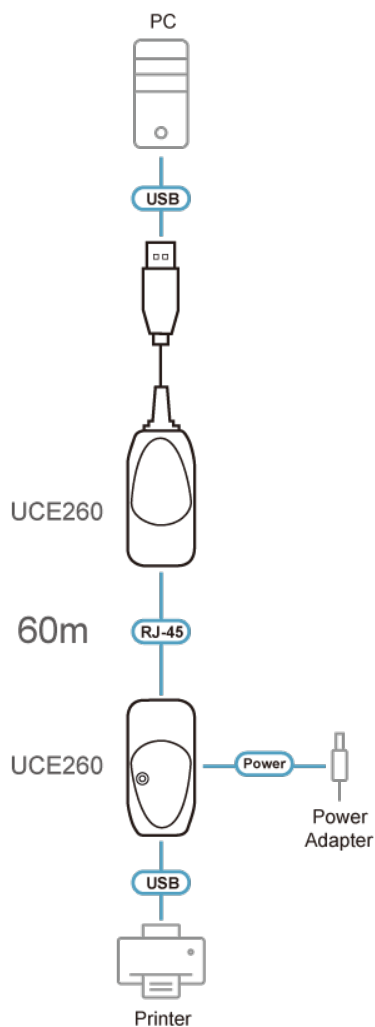

Please refer to your USB video device's user manual or user guide for its compatibility and declaration.

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.