

## CS74U

4-Port USB VGA/Audio KVM Switch



The CS74U 4-Port USB KVM Switch is a desktop control unit that allows users to access four computers from a single KVM console (keyboard and mouse, audio and VGA monitor).

With the CS74U, you can access computers conveniently using port selection pushbuttons located on the unit's front panel.

Setup is fast and easy; simply plug cables into their appropriate ports. There is no software to configure, no installation routines, and no incompatibility problems. Since the CS74U intercepts keyboard input directly, it will work on multiple computing platforms.

### Features


- One VGA console controls four USB VGA interface computers
- Computer selection via front panel pushbuttons
- Multiplatform support - Windows, Linux and Mac
- Audio Enabled – full bass response provides a rich experience for 2.1 channel surround sound systems
- Superior video quality – 2048 x 1536; DDC2B
- Supports USB hot-plugging
- Bus-Powered\*

\*Note: The CS74U is bus-powered, which draws power from the connected PCs. To provide enhanced power via the built-in power jack, it is required that you use a compatible ATEN power adapter. Please contact your ATEN dealer or Technical Support for detailed information.

# Specification

|                        |                                                                                                                                                                                                                                                    |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Computer Connections   | 4                                                                                                                                                                                                                                                  |
| Port Selection         | Pushbutton                                                                                                                                                                                                                                         |
| Connectors             |                                                                                                                                                                                                                                                    |
| Console Ports          | 2 x USB Type A Female (Black)<br>1 x HDB-15 Female (Blue)<br>1 x mini stereo Jack Female (Pink)<br>1 x mini stereo Jack Female (Green)                                                                                                             |
| KVM Ports              | 4 x SPHD-18 Female (Green)                                                                                                                                                                                                                         |
| Power                  | 1 x DC 5V Jack<br>Note: Please contact your ATEN dealer or Technical Support for the compatible ATEN power adapter.                                                                                                                                |
| LEDs                   |                                                                                                                                                                                                                                                    |
| Online                 | 4 (Orange)                                                                                                                                                                                                                                         |
| Selected               | 4 (Green)                                                                                                                                                                                                                                          |
| Switches               |                                                                                                                                                                                                                                                    |
| Selected               | 4 x Pushbuttons                                                                                                                                                                                                                                    |
| Video                  | 2048 x 1536 @ 60 Hz; DDC2B                                                                                                                                                                                                                         |
| Power Consumption      | DC5V:0.177W:5BTU/h<br><br>Note:<br>● The measurement in Watts indicates the typical power consumption of the device with no external loading.<br>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. |
| Environmental          |                                                                                                                                                                                                                                                    |
| Operating Temperature  | 0-50°C                                                                                                                                                                                                                                             |
| Storage Temperature    | -20-60°C                                                                                                                                                                                                                                           |
| Humidity               | 0 - 80% RH, Non-condensing                                                                                                                                                                                                                         |
| Physical Properties    |                                                                                                                                                                                                                                                    |
| Housing                | Metal                                                                                                                                                                                                                                              |
| Weight                 | 0.64 kg ( 1.41 lb )                                                                                                                                                                                                                                |
| Dimensions (L x W x H) | 20.00 x 7.65 x 4.40 cm<br>(7.87 x 3.01 x 1.73 in.)                                                                                                                                                                                                 |
| Note                   | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.                                                                                                                    |

Diagram

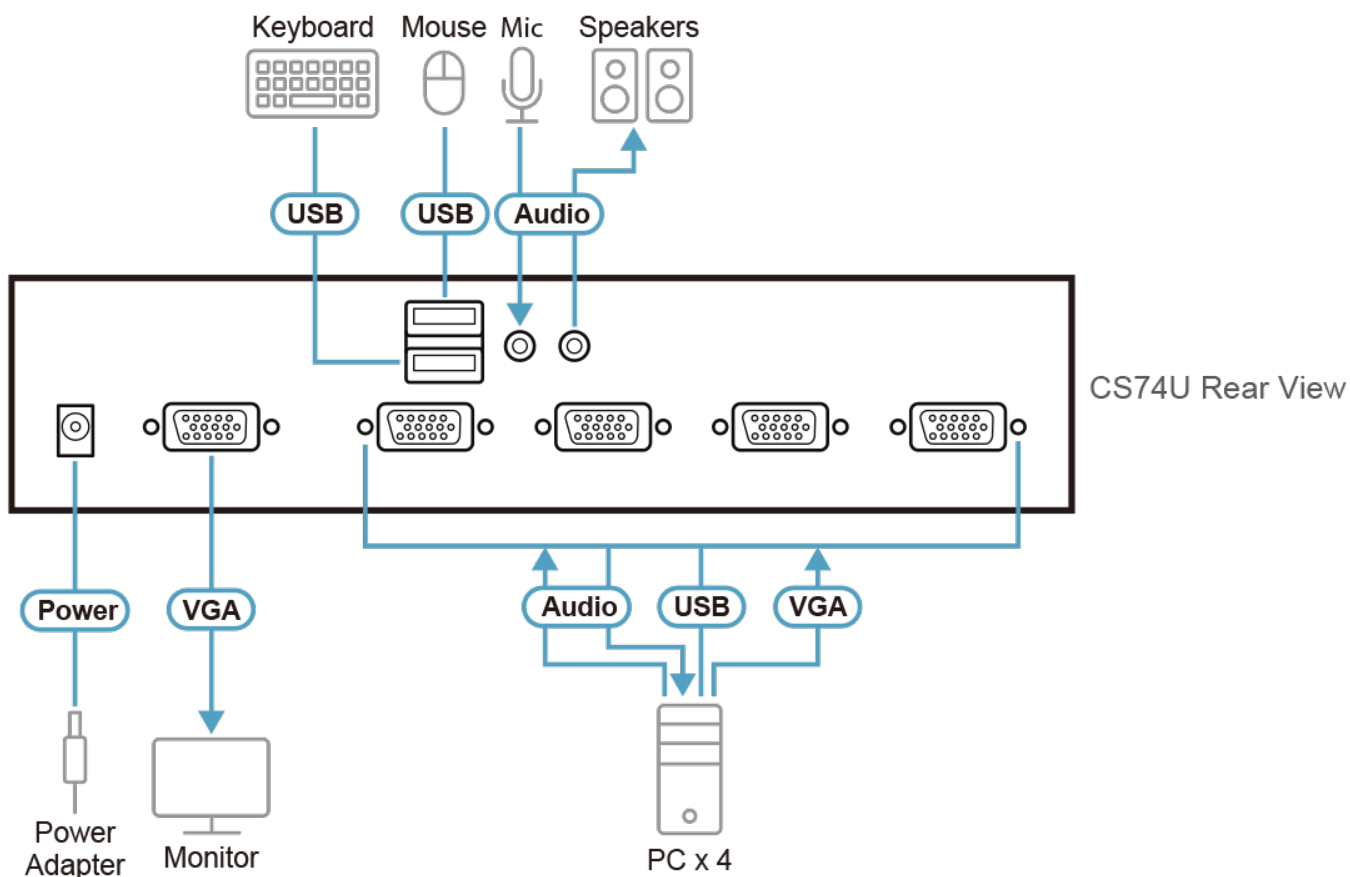

The CS74U is bus-powered, which draws power from the connected PCs. To provide enhanced power via the built-in power jack, it is required that you use a compatible ATEN power adapter. Please contact your ATEN dealer or Technical Support for detailed information.

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.