

## US434

4 x 4 USB 3.2 Gen1 Peripheral Sharing Switch



ATEN US434 is a 4-port USB 3.2 Gen1 peripheral sharing device that allows users to share four USB devices between 4 different computers. US434 is USB 3.2 Gen1 compliant, which can support data transfer rate up to 5Gbps and backwards compatible with USB 2.0 and USB1.1. It is perfect for high-bandwidth devices, such as USB docking stations or HD cameras.

In addition, US434 also features an external remote port selector that can simplify desktop layout, and select which computer needs to use the USB devices. With its compact and all-in-one design, you can create a space saving, convenient and productive work environment.




### Features

- Enables 4 computers to share 4 USB 3.2 Gen1 devices
- Simple port selection via remote port selector for convenient switch placement
- USB 3.2 Gen1 compliant, supporting data transfer rates of up to 5 Gbps
- LEDs indicates which computer is active
- Over-current protection
- Multiplatform support – Windows, Linux and Mac
- Bus-powered
- Micro USB power jack for additional power supply
- Hot pluggable, no driver or software required

## Specification

|                        |                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Computer Connections   | 4                                                                                                                                                                                                                                                                                                                                                                          |
| Port Selection         | Remote port selector                                                                                                                                                                                                                                                                                                                                                       |
| Connectors             |                                                                                                                                                                                                                                                                                                                                                                            |
| Computer               | 4 x USB Type B Female (Blue)                                                                                                                                                                                                                                                                                                                                               |
| Device                 | 4 x USB Type A Female (Blue)                                                                                                                                                                                                                                                                                                                                               |
| Power (Optional)       | 1 x USB micro B Female (Black)                                                                                                                                                                                                                                                                                                                                             |
| Cable Length           |                                                                                                                                                                                                                                                                                                                                                                            |
| USB Cable              | USB 3.2 Gen 1 B to A Cable 1.2m x 2<br>USB 3.2 Gen 1 B to A Cable 1.8m x 2                                                                                                                                                                                                                                                                                                 |
| Remote Port Selector   | 1.8 m                                                                                                                                                                                                                                                                                                                                                                      |
| LEDs                   |                                                                                                                                                                                                                                                                                                                                                                            |
| Selected               | 4 (White)                                                                                                                                                                                                                                                                                                                                                                  |
| Environmental          |                                                                                                                                                                                                                                                                                                                                                                            |
| Operating Temperature  | 0–40°C                                                                                                                                                                                                                                                                                                                                                                     |
| Storage Temperature    | -20–60°C                                                                                                                                                                                                                                                                                                                                                                   |
| Humidity               | 0–80% RH, Non-condensing                                                                                                                                                                                                                                                                                                                                                   |
| Physical Properties    |                                                                                                                                                                                                                                                                                                                                                                            |
| Housing                | Plastic                                                                                                                                                                                                                                                                                                                                                                    |
| Weight                 | 0.13 kg ( 0.29 lb )                                                                                                                                                                                                                                                                                                                                                        |
| Dimensions (L x W x H) | 9.37 x 9.30 x 2.68 cm<br>(3.69 x 3.66 x 1.06 in.)                                                                                                                                                                                                                                                                                                                          |
| Note                   | According to updates from the USB-IF, USB 3.0 is now referred to as USB 3.2 Gen 1. On this website, the product is presented using the updated naming. However, the product unit and packaging may still be labeled as USB 3.0, based on the naming used at the time of development. Both refer to the same specification, supporting data transfer rates of up to 5 Gbps. |
| Note                   | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.                                                                                                                                                                                                                                            |

## Diagram

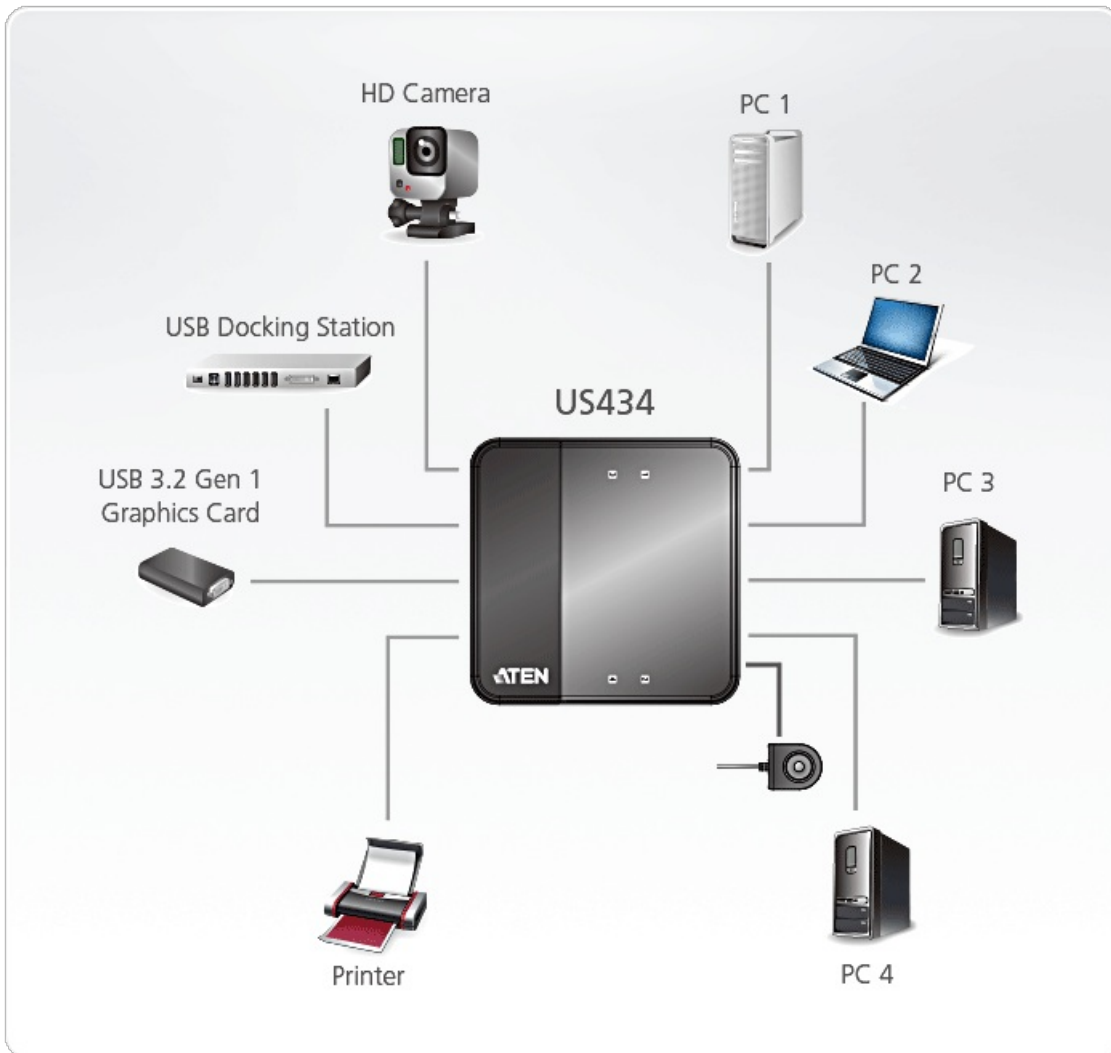

### **ATEN International Co., Ltd.**

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.