

## CS1744

4-Port USB VGA Dual Display/Audio KVMP™ Switch



CS1744 KVM Switch integrates functions of video signal dual output and USB KVM switches. It allows a computer with dual-screen support to pair with two VGA/SVGA/Multisync displays via a USB keyboard and mouse. Furthermore, CS1744 provides 1 USB port on each of the front and rear panels, allowing each server to share any USB peripheral device that is connected to this HUB.

### Features


- Allows one USB keyboard, USB mouse, speakers, microphone and two displays to control four dual display computers
- 2 port USB Hub built in
- Multiplatform support: compatible with all operation platforms PC (Windows, Linux and most others), Mac and Sun
- With speaker and microphone support
- [Bi-directional switching and flexible interoperability; switch permits independent PC, independent peripheral, and independent audio function, regardless of KVM switch focus](#)
- Buzzer On/Off via hotkey
- Keyboard and mouse emulation for error free booting
- Computer selection via front panel pushbuttons and hotkeys
- Superior video quality - up to 2048 x 1536; DDC2B
- Firmware upgradeable
- OS Support: Windows 2000, Windows XP, [Windows Vista](#), LINUX, Mac, Sun and FreeBSD
- SUN/Mac keyboard support and emulation\*
  - \*1. PC keyboard combinations emulate SUN/Mac keyboards.
  - \*2. SUN/Mac keyboards only work with their own computers.

### Specifications

|                                 |                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Computer Connections            | 4                                                                                                                                      |
| Port Selection                  | Hotkey, Pushbutton                                                                                                                     |
| USB Port / Audio Port Selection | Hotkey                                                                                                                                 |
| Connectors                      |                                                                                                                                        |
| Console Ports                   | 2 x USB Type A Female (White)<br>2 x HDB-15 Female (Blue)<br>1 x Mini Stereo Jack Female (Green)<br>1 x Mini Stereo Jack Female (Pink) |
| KVM Ports                       | 4 x SPHD-15 Male (Yellow)<br>4 x SPHD-15 Female (Green)                                                                                |

|                        |                                                                                                                                                                                                                                                    |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| USB Hub                | 2 x USB Type A Female (White)                                                                                                                                                                                                                      |
| Firmware Upgrade       | 1 x RJ-11 Female (Black)                                                                                                                                                                                                                           |
| Power                  | 1 x DC Jack (Black)                                                                                                                                                                                                                                |
| Switches               |                                                                                                                                                                                                                                                    |
| Selected               | 4 x Pushbutton                                                                                                                                                                                                                                     |
| LEDs                   |                                                                                                                                                                                                                                                    |
| USB Link               | 4 (Green)                                                                                                                                                                                                                                          |
| On Line /Selected      | 4 (Orange)                                                                                                                                                                                                                                         |
| Emulation              |                                                                                                                                                                                                                                                    |
| Keyboard / Mouse       | USB                                                                                                                                                                                                                                                |
| Video                  | 2048 x 1536; DDC2B                                                                                                                                                                                                                                 |
| Scan Interval          | 1-99 seconds                                                                                                                                                                                                                                       |
| Power Consumption      | DC5V:1.13W:31BTU/h<br><br>Note:<br>● The measurement in Watts indicates the typical power consumption of the device with no external loading.<br>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. |
| Environmental          |                                                                                                                                                                                                                                                    |
| Operating Temperature  | 0-50°C                                                                                                                                                                                                                                             |
| Storage Temperature    | -20-60°C                                                                                                                                                                                                                                           |
| Humidity               | 0-80% RH, Non-condensing                                                                                                                                                                                                                           |
| Physical Properties    |                                                                                                                                                                                                                                                    |
| Housing                | Metal                                                                                                                                                                                                                                              |
| Weight                 | 1.03 kg ( 2.27 lb )                                                                                                                                                                                                                                |
| Dimensions (L x W x H) | 27.00 x 8.80 x 5.55 cm<br>(10.63 x 3.46 x 2.19 in.)                                                                                                                                                                                                |
| Note                   | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.                                                                                                                    |

## Diagram

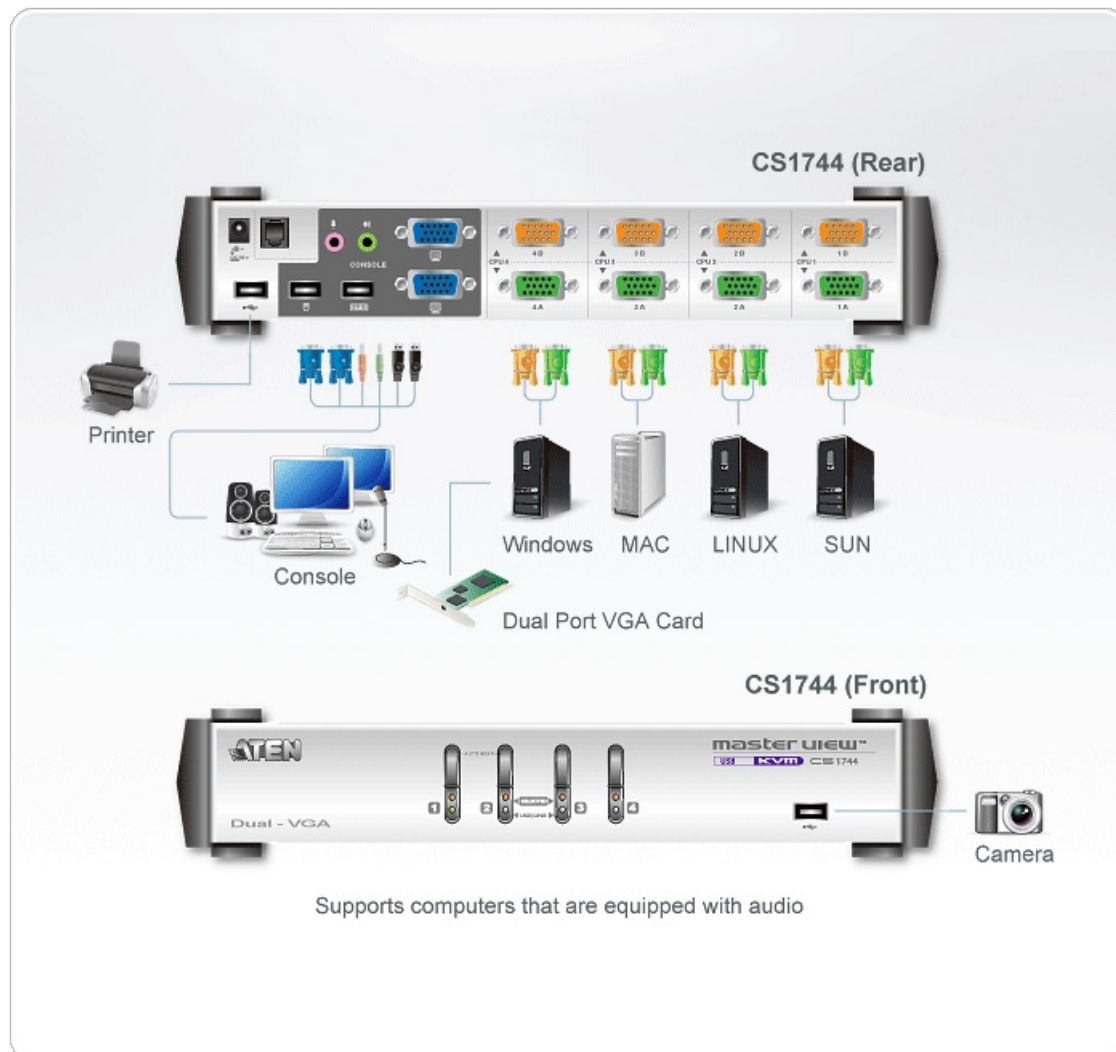

### ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their  
 respective owners.