

CL3708i

1-Local/Remote Shared Access 8-Port USB HDMI Single Rail WideScreen FHD LCD KVM over IP Switch



The ATEN CL3708iNW is a space-efficient 1U single-rail LCD KVM over IP switch designed for mission-critical environments such as control rooms and [data centers](#). Integrating an 18.5" LED-backlit widescreen monitor, full keyboard, and touchpad into a short-depth sliding housing, it delivers reliable local and over IP access while maximizing valuable rack space.

Maximize Rack Space While Maintaining Full Local Control

Built into a compact 1U single-rail chassis with a short-depth design, the CL3708iNW fits perfectly in [shallow racks](#) and space-constrained installations. The all-in-one console design eliminates the need for external peripherals, while an integrated LED illumination light ensures clear visibility for accurate operation in low-light, 24/7 environments.

Centralized and Flexible Control of Multiple Systems

Supporting direct USB and HDMI connections to 8 computers, the CL3708iNW enables efficient centralized management from a single console. An external USB and HDMI console output allows simultaneous local and external access, providing greater operational flexibility for multi-operator or extended workspace scenarios. System control is intuitive via front-panel pushbuttons, hotkeys, or a multilingual on-screen display (OSD). Broadcast Mode enables commands to be sent to multiple computers simultaneously, while Auto Scan Mode provides continuous monitoring of selected systems.

Crystal-Clear Full HD for Precise Monitoring

Engineered for reliable performance, the CL3708iNW delivers crisp Full HD 1920 x 1080 @ 60 Hz video. This ensures clear and accurate visual output, helping operators monitor critical systems with confidence in mission-critical environments. In addition, the CL3708iNW features [Panel Array Mode™](#) for simultaneous multi-server monitoring on a single screen, with each server displayed in an individual panel and customizable layouts for flexible viewing.

Simplified, Secure, and Efficient System Management

Three-level password protection safeguards against unauthorized access, a dedicated LAN port supports network-based firmware upgrades, and a front-panel hot-pluggable USB mouse port (HID-only) allows quick peripheral replacement to minimize downtime.

Note:

Optional rack mount kits are available. For more information, refer to Compatible Accessories below.

HDMI™
HIGH DEFINITION MULTIMEDIA INTERFACE

18.5" Widescreen

External Console

HTML5 WebClient

LED Illumination Light

Over-IP Access

Panel Array Mode™

Short-Depth Design

Features

• **Space Utility Optimization**

- Exclusive LED illumination light – designed by ATEN to illuminate the keyboard and touchpad to enhance usability in dimly lit settings
- Integrated LCD KVM console with an 18.5" LED-backlit widescreen LCD monitor in a single rail housing with top and bottom clearance for smooth operation in a 1U high system rack
- Short-depth design allows you to work with your rack-mounting equipment in narrow spaces
- Console lock – enables the console drawer to remain securely locked away in position when not in use

• **Reliability and Operational Versatility**

- Superior video quality – up to 1920 x 1080 @ 60 Hz
- External console port – enables management of connected computers from an external console (monitor, USB keyboard, and USB mouse)
- Computer selection via pushbuttons, hotkeys, and multilingual on-screen display (OSD)
- IP-based **LCD KVM switch** enabling shared local console access and remote access, allowing monitoring and control of multiple computers via a standard web browser over the network
- Broadcast mode – allows users to send commands from the console to all computers to perform operations simultaneously
- Three-level password security – only authorized users can view and control computers
- Auto Scan mode – enables continuous monitoring of user-selected computers
- Panel Array Mode™ enables simultaneous monitoring of multiple servers on a single screen, with each server's video output displayed in an individual panel and configurable panel layouts for flexible viewing
- Keyboard Language supports: English (UK), English (US), German (GER.), German (SWISS.), French, Hungarian, Italian, Japanese, Korean, Russian, Spanish, Swedish, Turkish and Traditional Chinese
- Additional hot-pluggable USB mouse port on front panel that supports HID device for keyboard and mouse

• **Installation Flexibility**

- Standard rack mount kit included
- Optional rack mount kits available including easy installation options*
- No software required
- Firmware upgradable via LAN port
- Supports hot-plugging

Note: Contact your ATEN dealer for product information.


[More information about "Easy Rack Mounting"...](#)

Specifications

Function	CL3708iNW
Computer Connections	
Direct	8
Maximum	8
Port Selection	OSD, Hotkey, Pushbutton
Connectors	
KVM Ports	8 x HDMI Female 8 x USB Type B Female
Power	1 x IEC 60320/C14
External Mouse Port	1 x USB Type A Female (Front)
External Console Ports	1 x HDMI Female 2 x USB Type A Female
LAN Ports	1 x RJ-45 Female
Switches	
Port Selection	8 x Pushbutton
Reset	1 x Semi-recessed Pushbutton
Power	1 x Rocker Switch
LCD Control	4 x Pushbutton
LCD Power	1 x LED Pushbutton
LEDs	
Online	8 (Orange)
Selected	8 (Green)
Power	1 x KVM Console (Dark Green) 1 x LCD (Orange)
Lock	1 x Num Lock (Green) 1 x Caps Lock (Green) 1 x Scroll Lock (Green)
LED Illumination Light	1 x LED Illumination Light
Panel Spec	
LCD Module	18.5" TFT-LCD
Resolution	1920 x 1080 @ 60 Hz
Response time	20 ms
Viewing Angle	178° (H), 178° (V)
Pixel Pitch	0.213 mm x 0.213 mm
Support Color	16.77M colors

Contrast Ratio	1000 : 1
Luminance	350 cd/m ²
Video	
Remote	1920 x 1200 @60 Hz
Input Video Resolution	up to 1920 x 1200 @ 60 Hz
Second console	1920 x 1200 @ 60 Hz
Scan Interval	1-255 seconds
Emulation	
Keyboard / Mouse	USB
Maximum Input Power Rating	100–240 VAC, 50/60 Hz, 1 A
Power Consumption	AC110V:35.2W:171BTU/h AC220V:35.7W:174BTU/h Note: ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.
Environmental	
Operating Temperature	0-40°C
Storage Temperature	-20-60°C
Humidity	0 - 80% RH, Non-condensing
Physical Properties	
Housing	Metal + Plastic
Rail Type	Single Rail
Weight	10.96 kg (24.14 lb)
Dimensions (L x W x H)	48.06 x 63.10 x 4.28 cm (18.92 x 24.84 x 1.69 in.)
Body Dimensions(L x W x H)	44.92 x 58.4 x 4.28 cm (17.69 x 22.99 x 1.69 in.)
Note	Body Dimensions exclude I/O ports, handles, and mounting brackets.
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

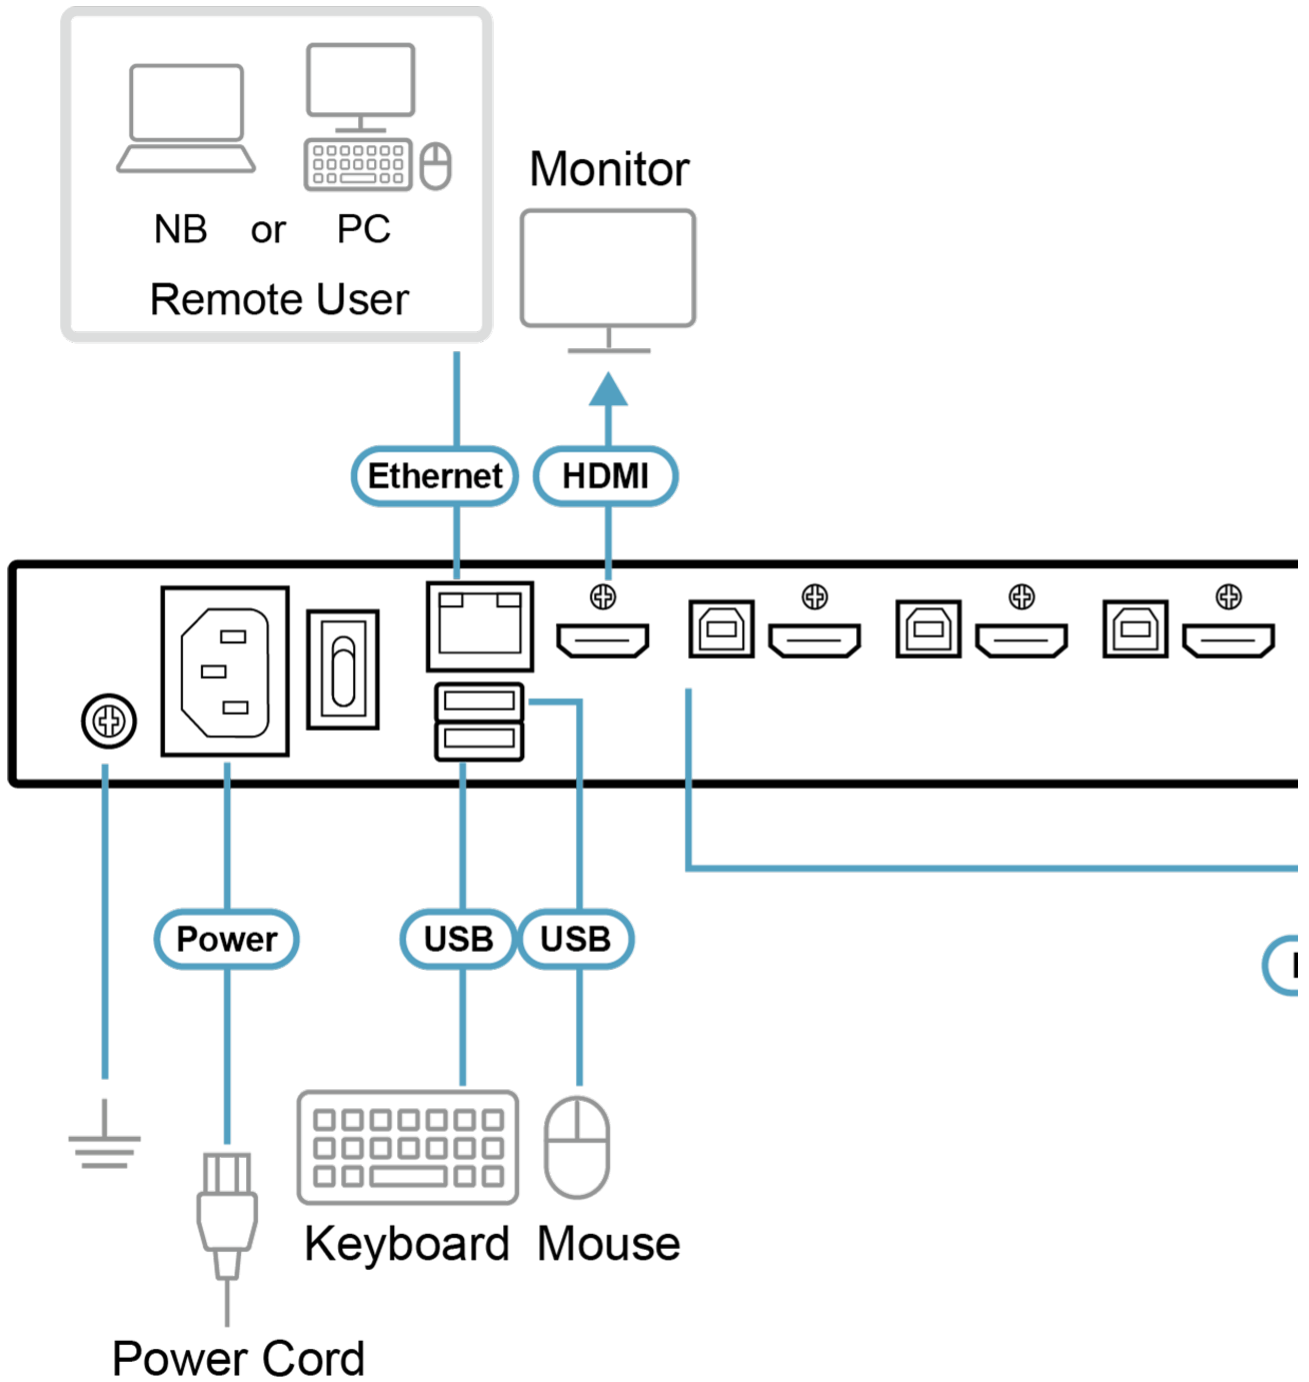



Simply Better Connections

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their
respective owners.