

## VS431

4-Port HDTV A/V Switch



The 4 port VS431 makes plugging and unplugging devices a thing of the past. This high quality component video (YPbPr) switch with on-board stereo audio is perfect for [HDTV](#) enthusiasts who want to add more inputs to their high-definition display. Use the VS431 to effortlessly connect a DVD player and set-top box or satellite receiver to your [HDTV](#) or projector.

Or, for the home theatre buff, the VS-431 provides a complete switching solution. The IR remote is an added convenience, allowing you to enjoy multimedia switching from the comfort of your seat. The VS431 [HDTV](#) switch supports high-end digital video devices such as DVD players and recorders, set-top boxes, satellite receivers, and more. It also works well for high-definition editing systems.

### Features


- Displays the video output of four digital devices on a single high definition monitor or projector.
- Stereo audio support.
- Quick and easy switching via front panel pushbuttons or IR remote control.
- Electronic switching for greater reliability and durability.
- Easy installation.
- Complete home theater switching solution.

### Specifications

Device Connections	4
Port Selection	Push Buttons,IR Remote Control
Connectors	
Input	4 x RCA Female (Green) 4 x RCA Female (Blue) 4 x RCA Female (Red) 4 x RCA Female (White)
Audio	4 x RCA Female (Red) 1 x RCA Female (White) 1 x RCA Female (Red)
Output	1 x RCA Female (Green)
Video	1 x RCA Female (Blue) 1 x RCA Female (Red)

Power	1 x DC Jack (Black)
Switches	
Power	4 x Pushbutton
LEDs	
Online	4 (Orange)
Selected	4 (Green)
Power Consumption	DC 5.3V, 0.8W (Max.)  Note: <ul style="list-style-type: none"> <li>● The measurement in Watts indicates the typical power consumption of the device with no external loading.</li> <li>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.</li> </ul>
Video	1600 x 1200 @ 60Hz; 480p, 720p, 1080i, 1080p
Environmental	
Operating Temperature	0-50°C
Storage Temperature	-20-60°C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	0.85 kg
Dimensions (L x W x H)	26.00 x 7.66 x 4.40 cm
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

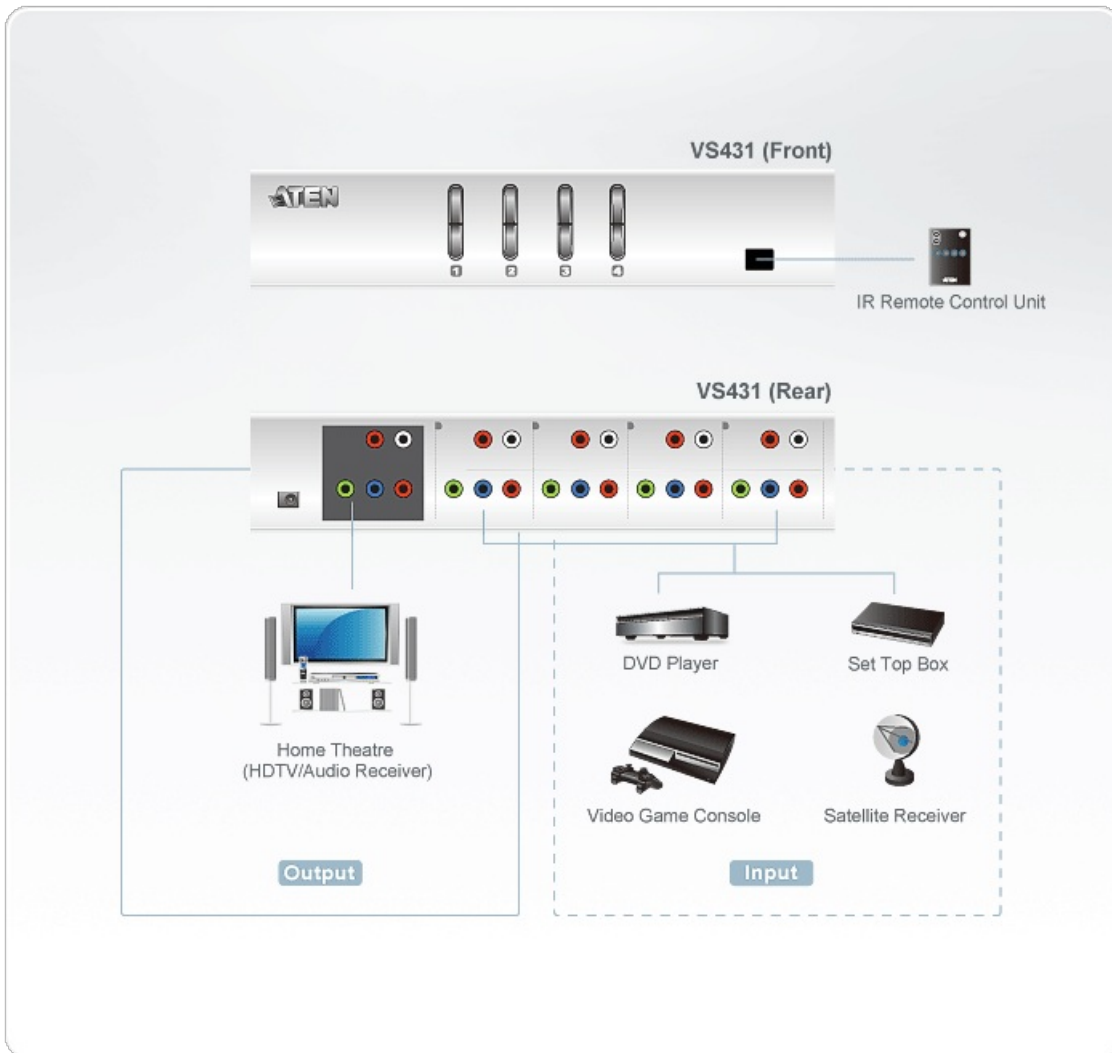

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their respective owners.