

## UC3002

USB-C to VGA Adapter



The UC3002 is a USB-C to VGA adapter that allows you to transfer the video of your USB-C equipped laptop, tablet or computer to a VGA display or projector. The UC3002 supports high video resolutions up to 2048 x 1152 @ 60 Hz so that you can conveniently scale your display output to a bigger monitor or do presentations from a projector.



### Features


- Transfer high-quality videos from a USB-C equipped laptop or tablet to a VGA display or projector
- [Compatible with the latest USB-C equipped laptops and tablet computers including Apple MacBook, Chromebook Pixel™ and Thunderbolt™ 3 computers](#)
- USB billboard feature proactively notifies users of alternate USB-C modes supported by the source device
- Premium manufacturing and high-quality design resists signal interference during video transmission
- Plug-and-Play – no software required
- Works with all major operating systems: Windows®, OS X®, and i-Pad Pro\*

\*Support iPad Pro video output and USB keyboard only

**Specifications**

|                        |   |
|------------------------|---|
| Video Input            |   |
| Interfaces             | 1 x USB-C Male (White)  |
| Video Output           |   |
| Interfaces             | 1 x HDB-15 Female (Black)   |
| Video                  |   |
| Max. Pixel Clock       | 200 MHz   |
| Max. Resolution        | 2048*1152@60Hz  |
| Compliance             | USB3.1 Type-C with DP Alt Mode (Thunderbolt™ 3 Compatible), USB Billboard Device Class, HDCP 1.3                                |
| Environmental          |   |
| Operating Temperature  | 0 - 40 °C   |
| Storage Temperature    | -20 - 60 °C   |
| Humidity               | 0 - 80% RH, Non-Condensing  |
| Physical Properties    |   |
| Housing                | Plastic   |
| Weight                 | 0.03 kg ( 0.07 lb )   |
| Dimensions (L x W x H) | 7.00 x 2.70 x 1.50 cm<br>(2.76 x 1.06 x 0.59 in.)   |
| Note                   | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |

Diagram

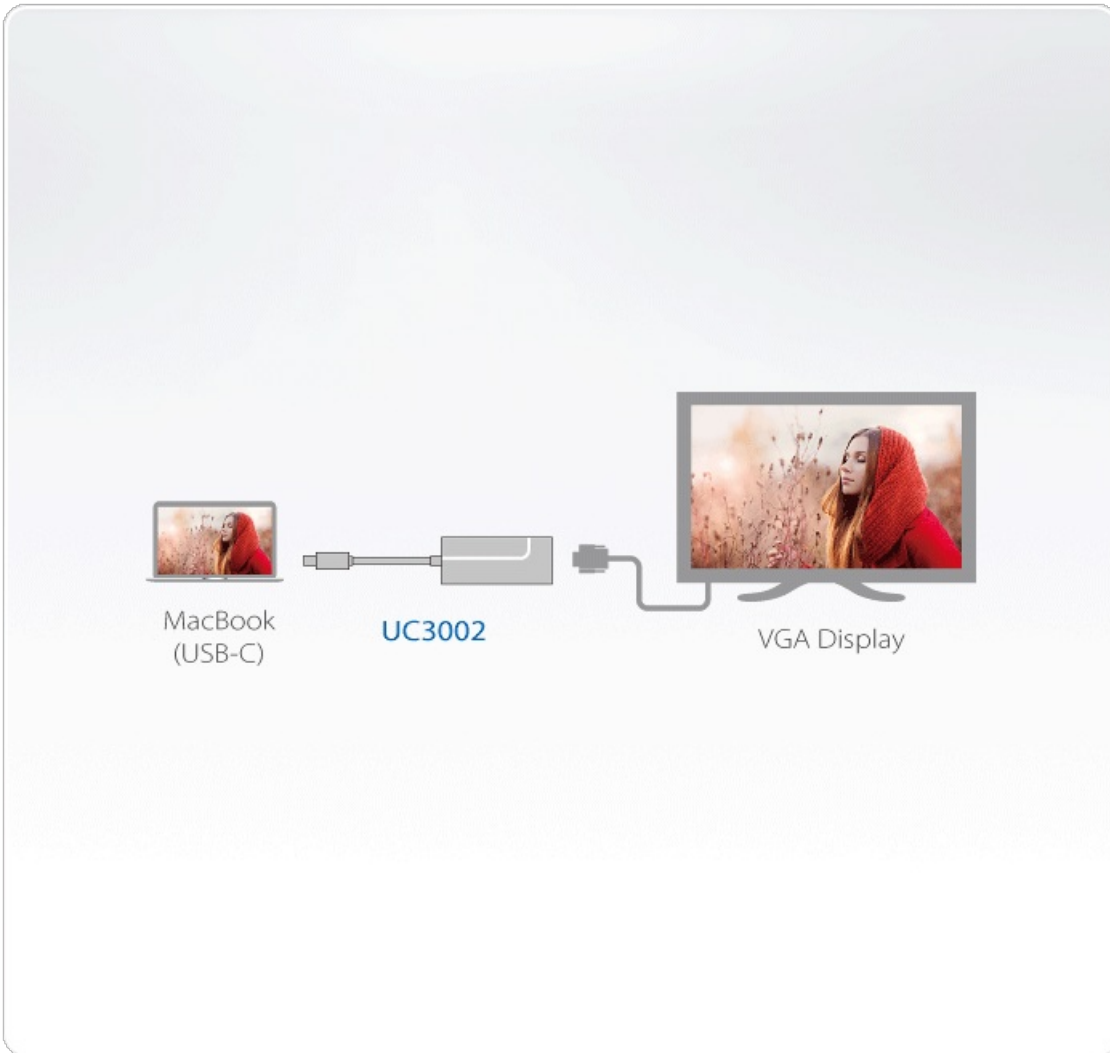

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their  
respective owners.