

CS62

Switch KVM PS/2 VGA cablato 2-porte (1,2 m)



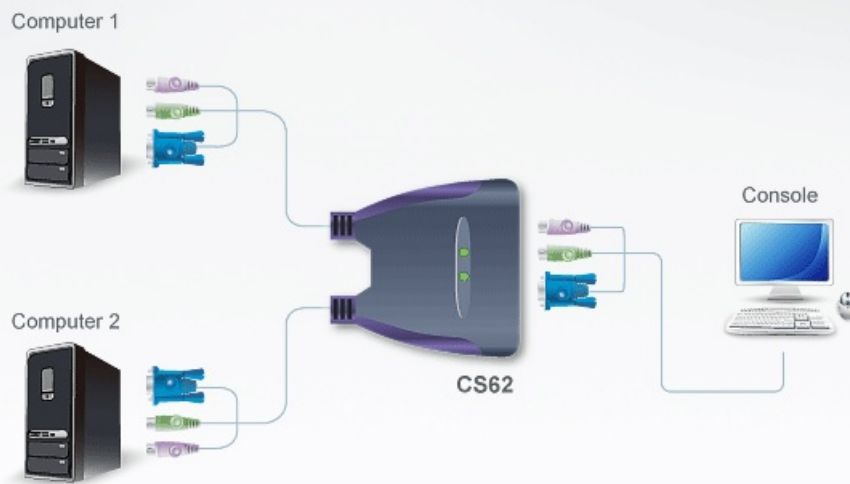
CS62 2-port KVM Switch has a handy design integrating with 1.2m of cable. It can control 2 servers via a single console.

Caratteristiche

- One PS/2 console controls 2 PS/2 computers
- Compact design, built in 1.2m cables
- All-in-one design
- Superior video quality-up to 2048 x 1536; DDC2B
- Auto Scan function to monitor computer operation
- Non-powered
- OS Compatibility includes Windows 2000/XP/ [Vista](#), LINUX and FreeBSD

Specifiche

Collegamenti del computer	2
Seleziona porta	Tasto di scelta rapida
Connettori	
Porte console	1 x Min-DIN 6 pin femmina (viola) 1 x Min-DIN 6 pin femmina (verde) 1 x HDB-15 femmina (blu)
Porte KVM	2 x Mini-DIN 6 pin maschio (viola) 2 x Mini-DIN 6 pin maschio (verde) 2 x HDB-15 maschio (blu)
LED	
Selezionato	2 (verde)
Lunghezza del cavo	
Computer	1,2 m
Emulazione	
Tastiera / Mouse	PS/2
Video	2048 x 1536; DDC2B
Intervallo di scansione	3, 5, 10, 20 secondi
Ambiente	
Temperatura di esercizio	0-50°C
Temperatura di conservazione	-20-60°C
Umidità	0 - 80% di umidità relativa, senza condensa
Proprietà fisiche	
Struttura	Plastica
Peso	0.27 kg (0.59 lb)
Dimensioni (L x P x A)	7.30 x 6.24 x 2.25 cm (2.87 x 2.46 x 0.89 in.)
Nota	Per alcuni prodotti per il montaggio su rack, le dimensioni fisiche standard LxPxA sono indicate utilizzando il formato LxLxA.

Diagramma topologia**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan

Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their
respective owners.