

## CS1774

4-Port USB VGA/Audio KVME™ Switch with Ethernet Hub



CS1774 is a multi-computer KVM Switch with built-in 3-in-1 (KVM Switch, USB 2.0 and Ethernet) function. It can simultaneously control 4 servers via a set of USB keyboard, mouse, and monitor. Moreover, the built-in USB and Ethernet Switch ports can rapidly access USB peripheral devices and share Internet resources at ease.

### Features


- USB 2.0 KVME™ Switch with Ethernet Hub/USB Hub
- Five auto-sensing dual speed ports (Ethernet/Fast Ethernet) plug-and-play enabled; hub complies with IEEE802.3/IEEE802.3u Standard
- 2 port USB 2.0 Hub built in
- Multiplatform support: compatible with all operation platforms PC(Windows, Linux and most others), Mac and Sun
- With speaker and microphone support
- [Bi-directional switching and flexible interoperability; switch permits independent PC, independent peripheral, and independent audio function, regardless of KVM switch focus](#)
- Buzzer On/Off via hotkey
- Keyboard and mouse emulation for error free booting
- Computer selection via front panel pushbuttons and hotkeys
- superior video quality - up to 2048 x 1536; DDC2B
- OS Compatibility: Windows 98, Windows ME, Windows 2000, Windows 2003, Windows XP, [Windows Vista](#), LINUX, Mac OS 8.6/9/10 and SUN Solaris 8/9.
- SUN/Mac keyboard support and emulation\*
  - \*1. PC keyboard combinations emulate SUN/Mac keyboards.
  - \*2. SUN/Mac keyboards only work with their own computers.

### Specifications

Computer Connections	4
Port Selection	Hotkey, Pushbutton
USB Port / Audio Port Selection	Hotkey
Connectors	
Console Ports	2 x USB Type A Female (White) 1 x HDB-15 Female (Blue) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink)

KVM Ports	4 x SPHD-15 Female (Green) 4 x Mini Stereo Jack Female (Green) 4 x Mini Stereo Jack Female (Pink)
USB Hub	2 x USB Type A Female (White)
Firmware Upgrade	1 x RJ-11 Female (Black)
Power	1 x DC Jack(Black)
Switches	
Ports	4 x Pushbutton
LEDs	
USB Link	4 (Green)
10/100 Mbps	5 (Green)
On Line /Selected	4 (Orange)
Link	5 (Green)
Emulation	
Keyboard / Mouse	USB
Video	2048 x 1536; DDC2B
Scan Interval	1-99 seconds
Power Consumption	DC 5.3V, 5W  Note: ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.
Environmental	
Operating Temperature	0-50°C
Storage Temperature	-20°-60°C
Humidity	0-80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	0.92 kg ( 2.03 lb )
Dimensions (L x W x H)	27.00 x 8.80 x 5.55 cm (10.63 x 3.46 x 2.19 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

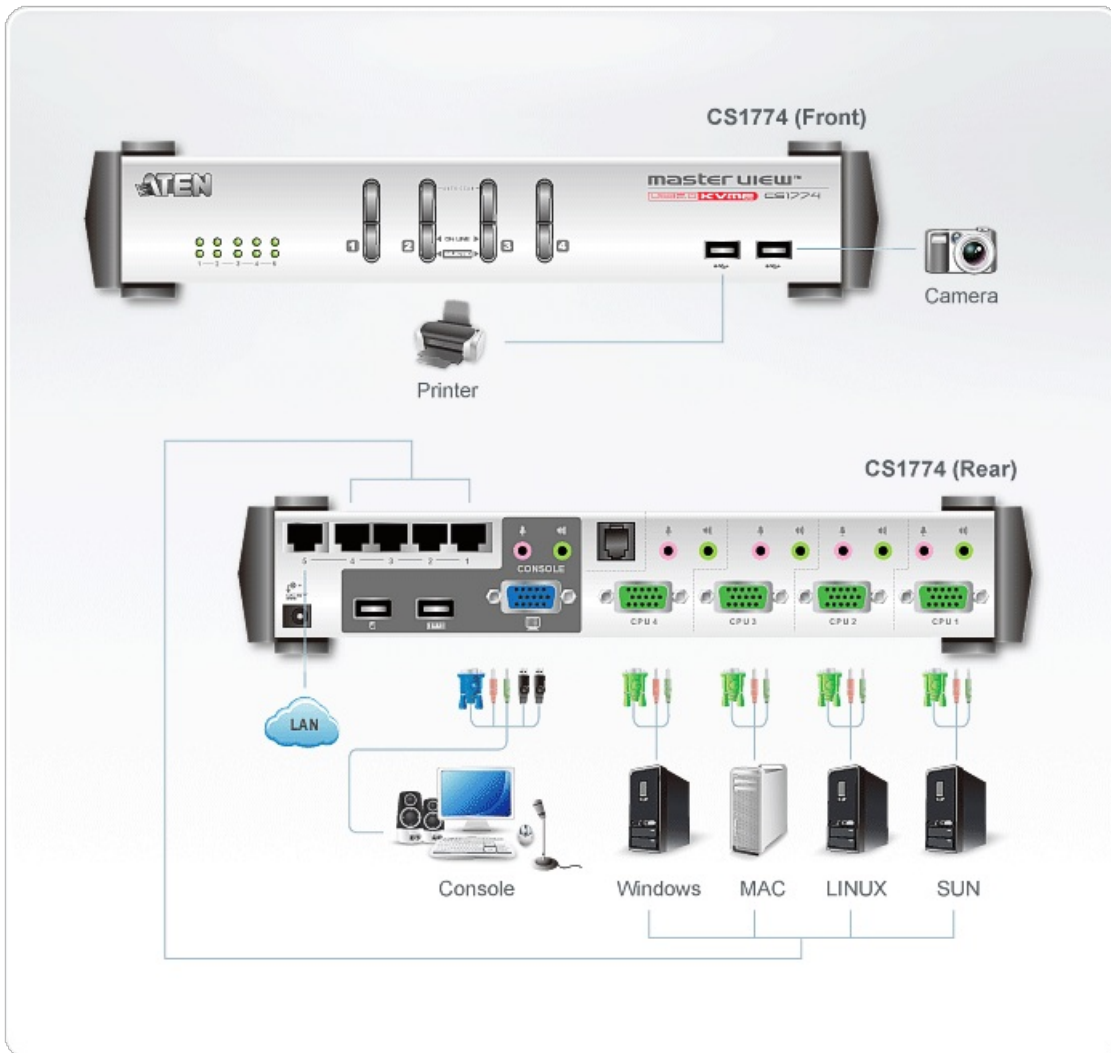

**ATEN International Co., Ltd.**

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their  
 respective owners.