

## KA7240

PS/2-USB VGA Virtual Media Console Module



The KA7240 Console Module offers secure access to the servers in a Matrix KVM Switch ( [KM0932/KM0532](#)) from a PS/2 or USB console (monitor, keyboard, and mouse) up to 300 meters away. It provides an extra computer port for integration with a computer workstation, enabling users to seamlessly switch between the local computer and the servers in the Matrix KVM Switch. The KA7240 also features an intuitive graphical user interface, the Graphical OSD, with easy-to-use menus and icons that enable easy access and efficient management.

KA7240 has a built-in RS-232 port. Administrators can establish a serial terminal login to the Console Module in order to control the KVM port access for all consoles connected to switch – any console can be assigned to access any KVM port from a single interface point. In addition, an automatic skew compensation function corrects color phase and timing errors that occur over long distance transmissions.

### Features

- One Combo Graphic Console Module can control a local computer and a matrix KVM switch ( [KM0932/KM0532](#))
- Virtual Media Support
- Audio enabled
- Enhanced video quality via automatic skew compensation support
- Supports PS/2 and USB keyboards and mice(Console)
- Switch between your workstation computer and the matrix KVM switch
- Graphical OSD-intuitive, easy-to-use graphical On Screen Display to manage servers
- RS-232 port login support permits an administrator to control the KVM port access for all consoles connected to switch – any console can be assigned to access any KVM port from a single interface point
- Connects to matrix KVM switch via Cat 5e/6 cable
- Superior Video Quality – 1920 x 1200 @ 60 Hz up to 200 meters; 1280 x 1024 @ 60 Hz up to 300 meters
- Manual video gain control for fine tuning
- Convenient computer selection via intuitive hotkey combinations or graphical OSD menus
- Firmware upgradeable


### Specifications

Computer Connections	1
Console Connections	1
Port Selection	GUI, Hotkey
Connectors	

Console Ports	2 x USB Type A Female (White) 1 x 6-pin Mini-DIN Female (Purple) 1 x 6-pin Mini-DIN Female (Green) 1 x HDB-15 Female (Blue)
Local Computer KVM Port	1 x SPHD-17 Female (Yellow)
Virtual Media	1 x USB Type A Female (White)
KVM Switch Ports	2 x RJ-45 Female
RS-232	1 x DB-9 Male (Black)
Audio	2 x Mini Stereo Jack Female (Green) 2 x Mini Stereo Jack Female (Pink)
Power	1 x DC Jack
Switches	
Firmware Upgrade	1 x Slide
Video Gain Adjustment	2 x Pushbutton
Selection	1 x Pushbutton (Local/Remote)
LEDs	
Power	1 (Blue)
Online	1 (Green)
Local	1 (Orange)
Remote	1 (Orange)
Emulation	
Keyboard / Mouse	PS/2; USB (PC, Sun, Mac)
Video	1920x1200@60Hz (200 m); 1280x1024@60Hz (300 m)
Scan Interval	1-240 Seconds
Power Consumption	DC5.3V:6.12W:48BTU/h  Note: ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.
Environmental	
Operating Temperature	0 - 50°C
Storage Temperature	-20 - 60°C
Humidity	0-80% RH, Non-condensing
Physical Properties	

Housing	Metal
Weight	1.26 kg ( 2.78 lb )
Dimensions (L x W x H)	22.71 x 17.15 x 5.48 cm (8.94 x 6.75 x 2.16 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

**Diagram**

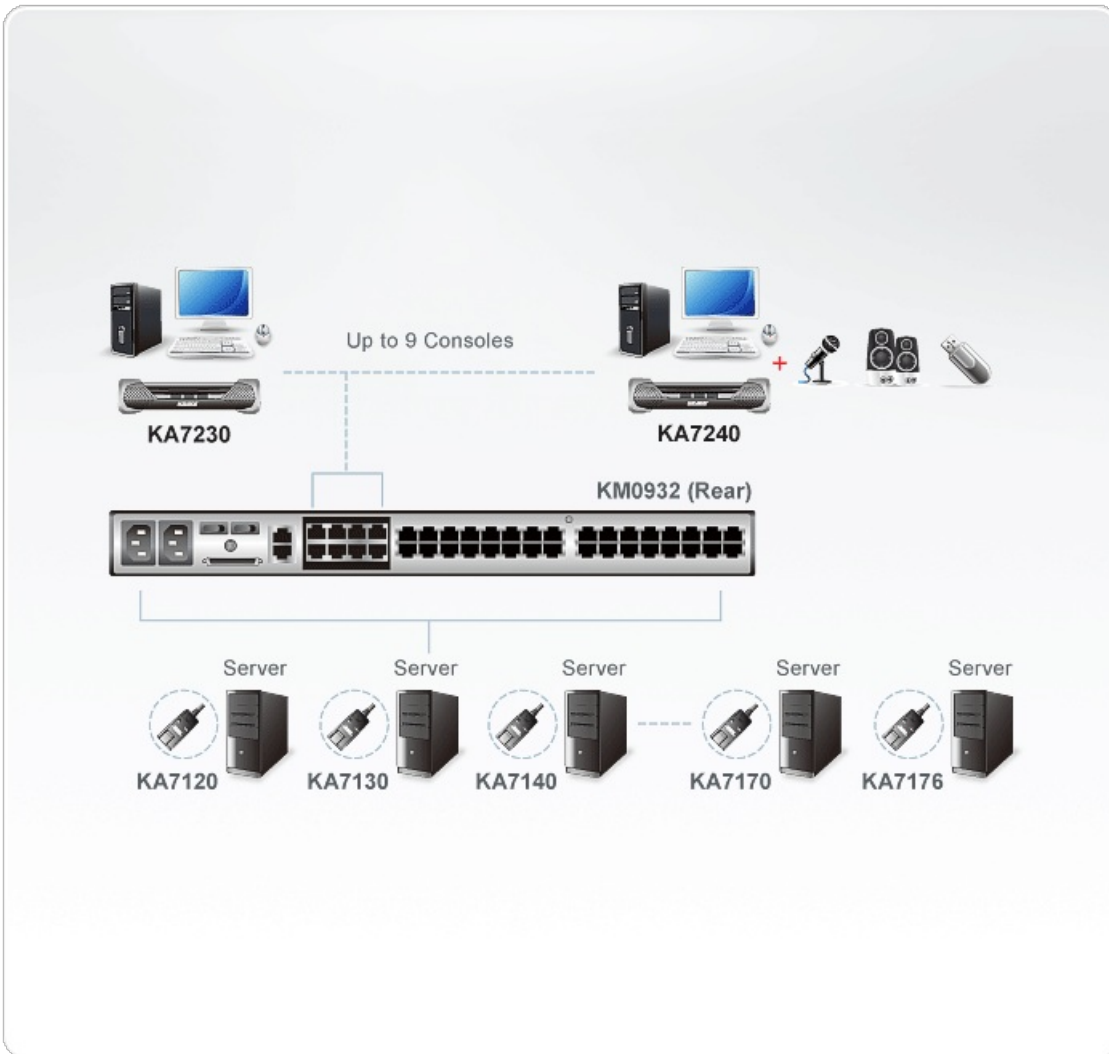

**ATEN International Co., Ltd.**

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.