

## KA7570

USB VGA KVM Adapter



The KA7570 USB KVM Adapter Cable connects the KVM switch to the video and USB ports of the target computer. With its small form factor and light weight design, it fits perfectly into most of the rack-mount or desktop servers.

### Features


- Keyboard and mouse emulation - keeps your server functioning smoothly when it is disconnected from the switch's KVM port or relocated to different KVM port
- Lifetime firmware upgrades
- Superior video quality - supports resolution up to 1920 x 1200 (Reduced blanking)\*
- Hot pluggable - add or remove computers without having to power down the switch.
- Compact size

\* This maximum resolution may vary depending on the transmission distance. For more details, please refer to the product pages of the connected KVM switches.

## Specifications

|                        |                                                                                                                                 |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Connectors             |                                                                                                                                 |
| Link                   | 1 x RJ-45 Female                                                                                                                |
| Computer               | 1 x USB Type A Male<br>1 x HDB-15 Male                                                                                          |
| LEDs                   |                                                                                                                                 |
| Online                 | 1 (Green)                                                                                                                       |
| Power                  | 1 (Orange)                                                                                                                      |
| Environmental          |                                                                                                                                 |
| Operating Temperature  | 0-50°C                                                                                                                          |
| Storage Temperature    | -20–60°C                                                                                                                        |
| Physical Properties    |                                                                                                                                 |
| Housing                | Plastic                                                                                                                         |
| Weight                 | 0.15 kg ( 0.33 lb )                                                                                                             |
| Dimensions (L x W x H) | 9.00 x 4.30 x 2.18 cm<br>(3.54 x 1.69 x 0.86 in.)                                                                               |
| Note                   | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |

## Diagram

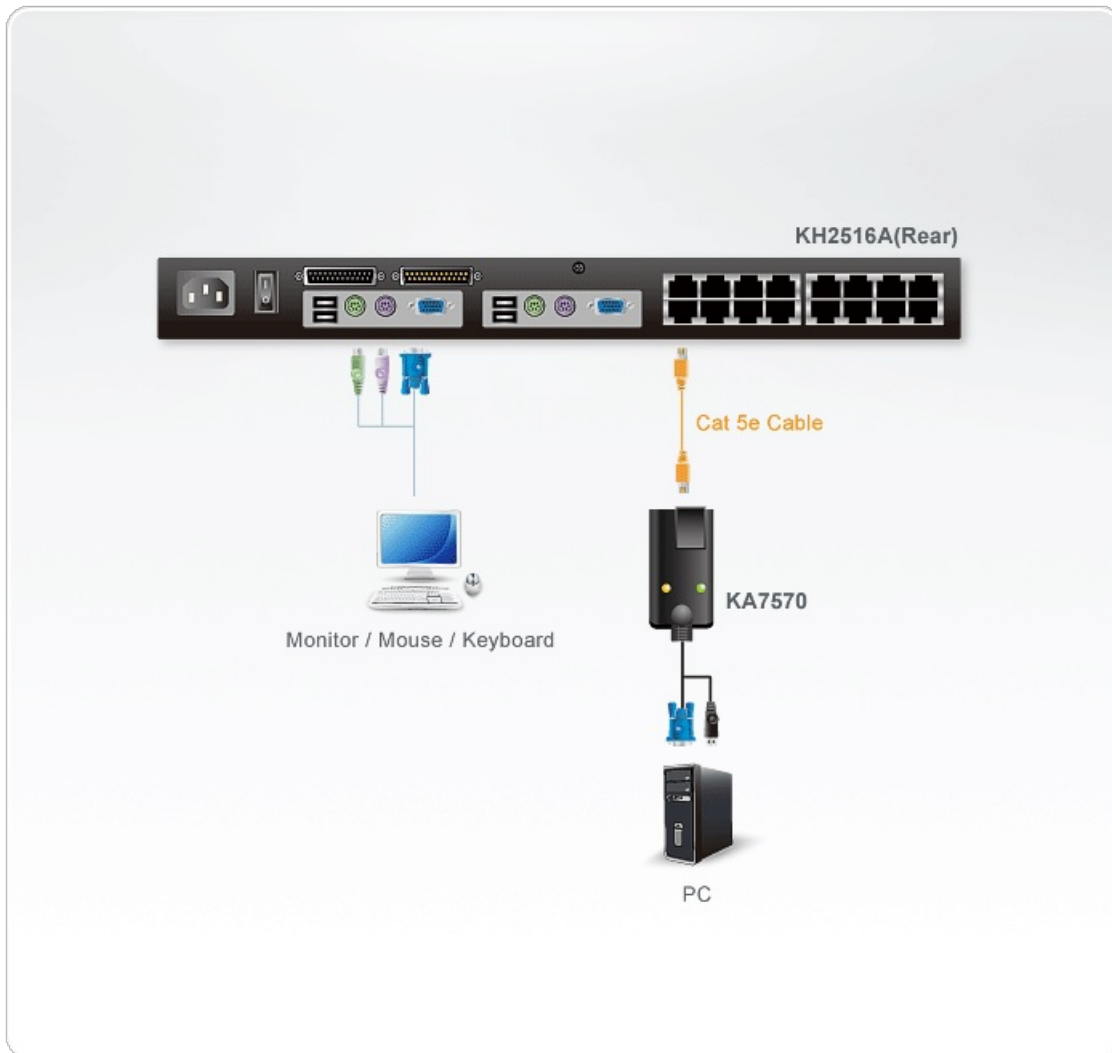

### ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their  
 respective owners.