


VK320

8" Touch Panel



VK320 8" Touch Panel

The VK320 8" Touch Panel centralizes system control through an intuitive, responsive interface, allowing quick switching between the ATEN Control System app and third-party applications. Integrated with ATEN's Room Booking System, it also enables room status updates directly from the panel, streamlining meeting setup. Its compact 8" design and PoE capability make it ideal for space-efficient installations such as digital podiums and lecterns, where minimal footprint and simplified cabling are essential.




App Switching



RBS Integration




Video Streaming Preview



Multi-Room Centralized Control




Power over Ethernet



US / EU Mounting


Third-Party Application Control with AppSwitcher

In addition to interfacing with the ATEN Control System, the VK320 also serves as a dedicated, cost-effective touch panel for third-party apps such as video conferencing, device control, or custom room apps, enabling direct control without a separate controller.

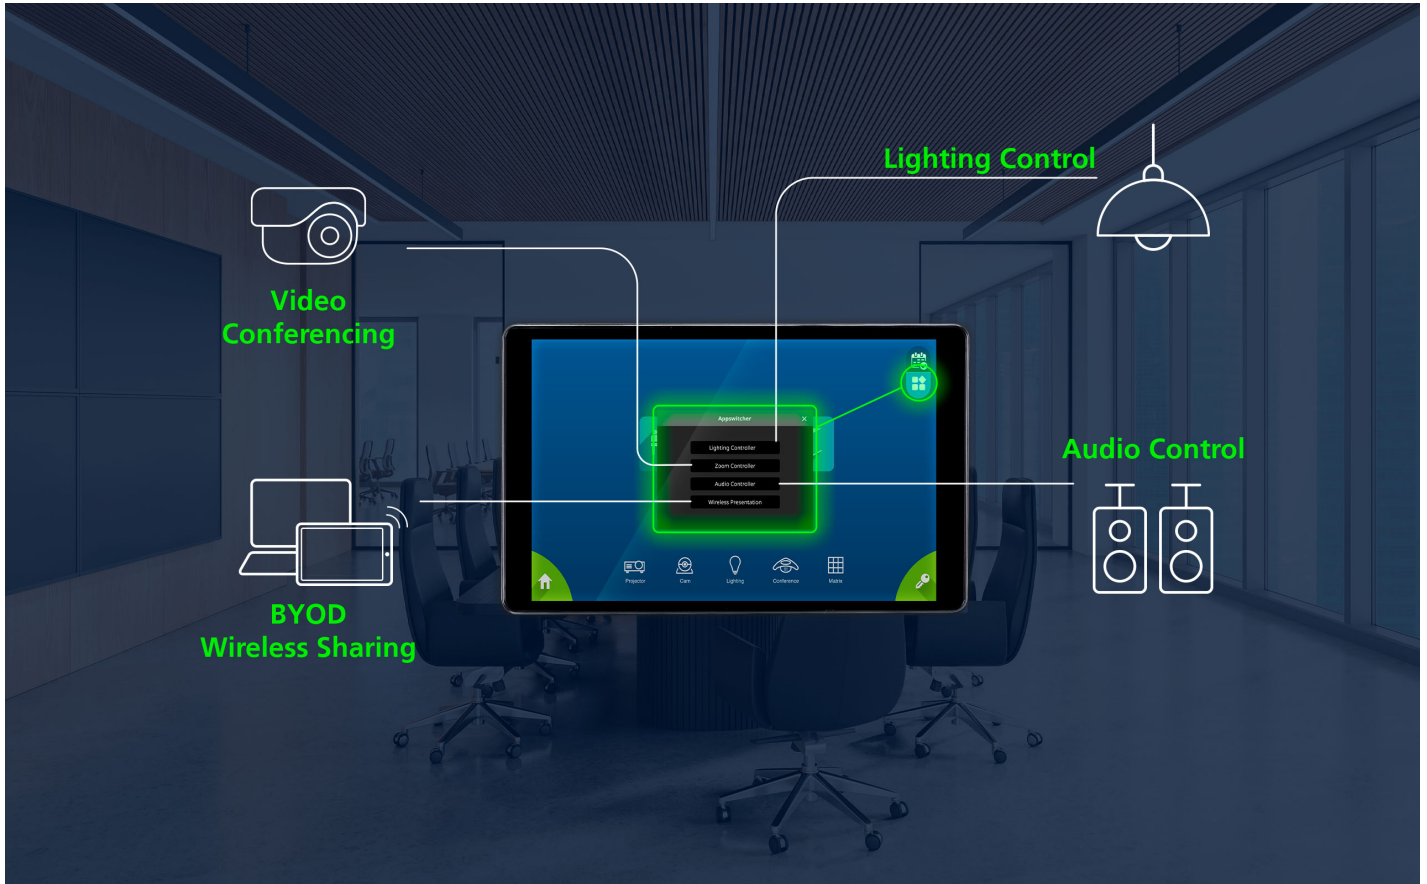


Streamlining Access with In-Room Booking Control

With integration into [ATEN Unizon](#) and the Room Booking System, booking a room, checking in or out, viewing room status, and extending a meeting are all just a few taps away on the panel – anytime during a meeting.

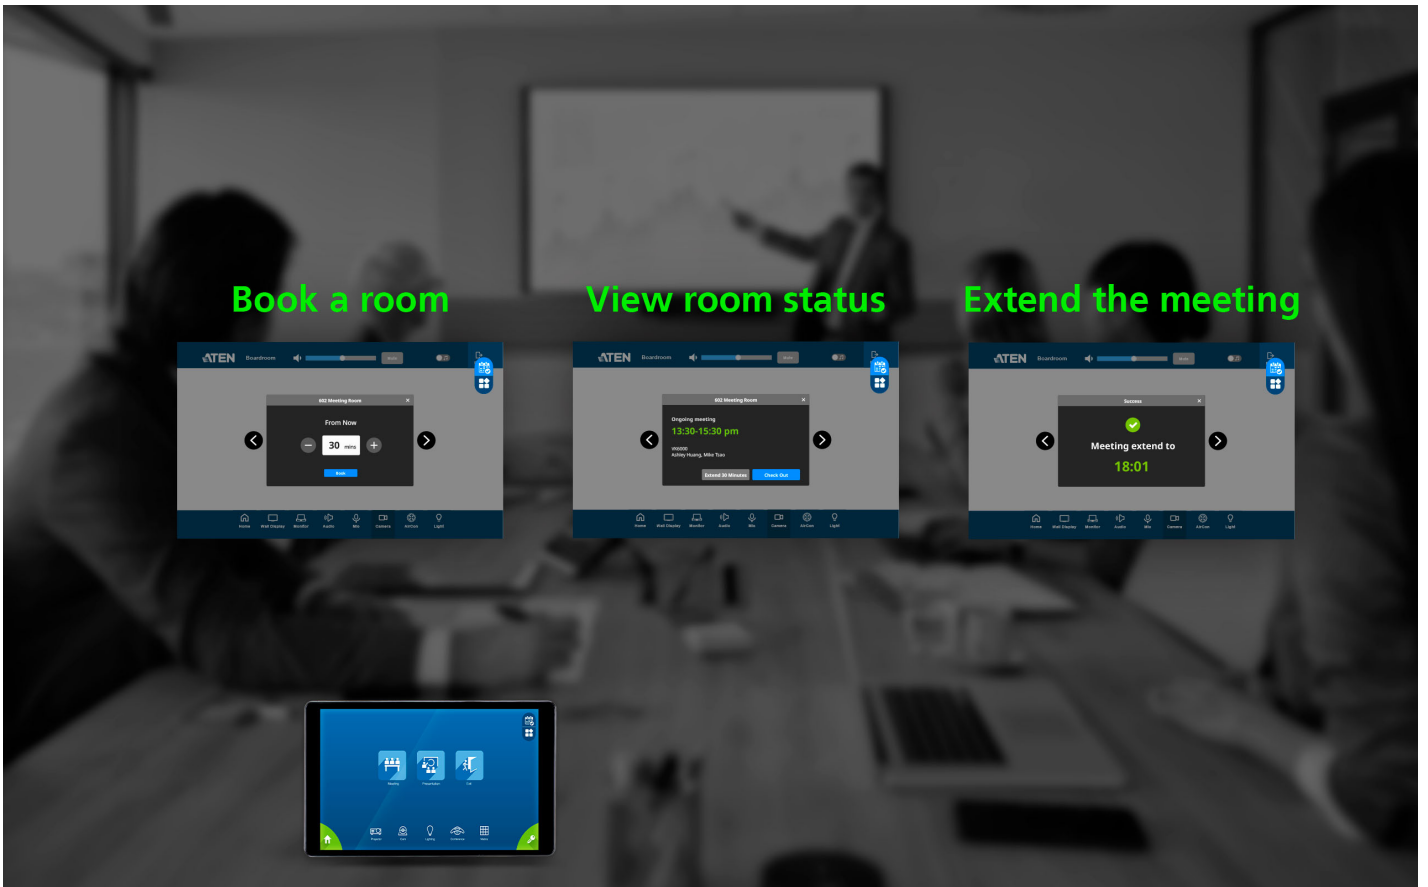

Real-Time Video Streaming Preview

The VK320 displays real-time feeds from IP cameras and ATEN VE89 series video over IP transmitters via native RTSP/ONVIF protocols, enabling direct preview and seamless switching of video sources from the panel.

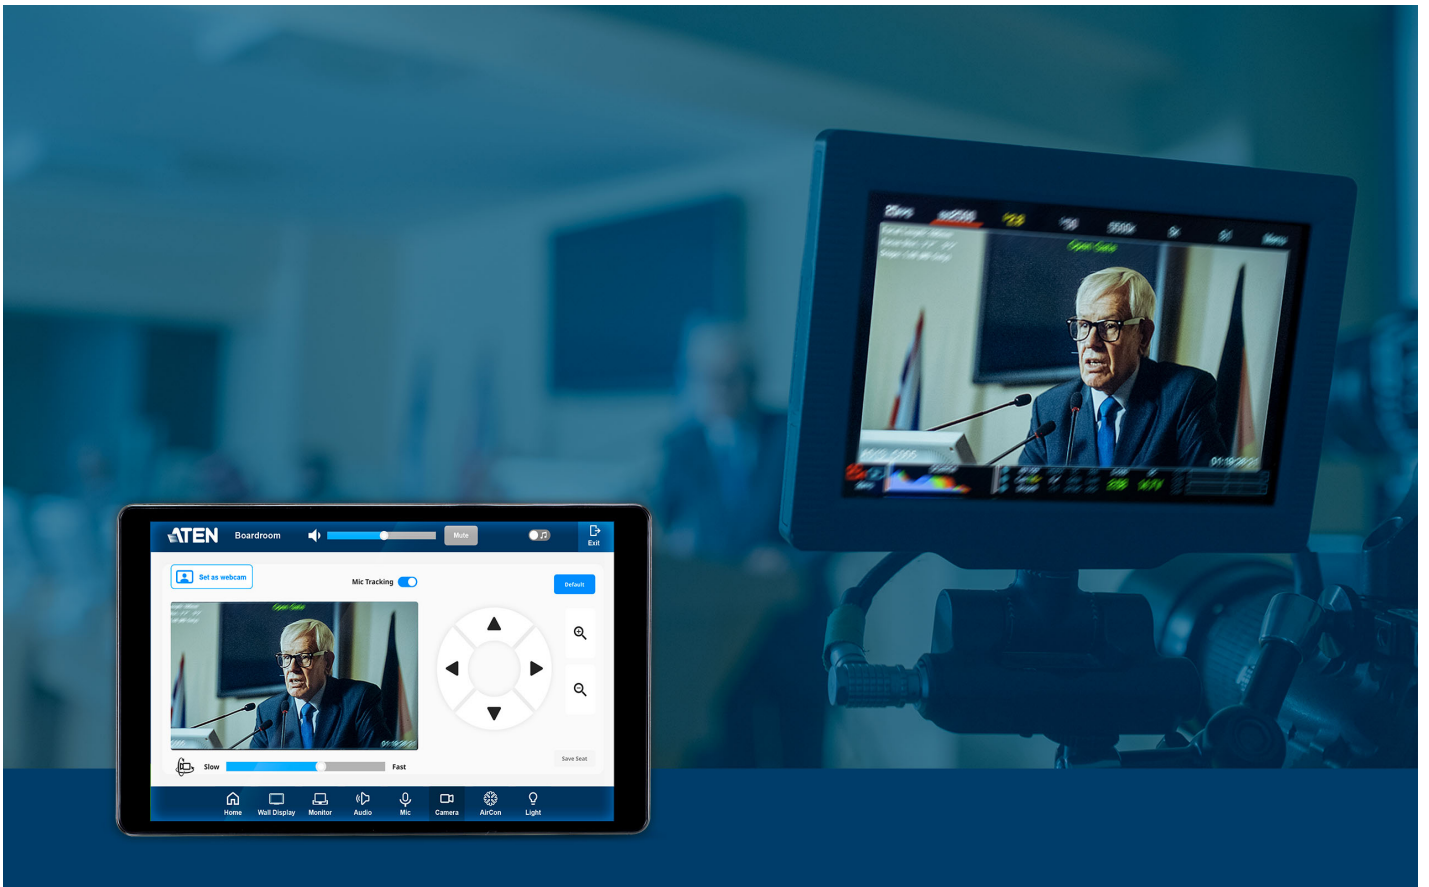

Centralized Room Management

With multi-viewer support, multiple rooms can be monitored and controlled from a single VK320 panel, with the entire environment easily managed through seamless switching between different room views.

Talk to Our Experts

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly

First Name *

Last Name *

- Country *


Company *

Email *

Phone Number *

- Customer Type *


Job Title *



App Switching




RBS Integration




Video Streaming
Preview



Multi-Room
Centralized Control



Power
over Ethernet



US/EU Mounting

Features

The ATEN VK320 is an 8" Touch Panel featuring capacitive multi-touch IPS-LCD screen with a narrow bezel. Natively installed with the ATEN Control System app, the touch panel is compatible with ATEN Control Boxes and Control Pads.

The VK320 supports Power over Ethernet (PoE), which allows power and data to be carried over a single Ethernet cable to the touch panel, making it perfect for applications that require solid and wired connections.

The Touch Panel VK320 features an in-wall design and a sophisticated touch panel that comes complete with an 86-type junction box, ensuring a versatile and efficient solution. The VK320 is also perfectly suitable for the smaller and compact scenarios such as digital podiums or lecterns. It is worth noting that the VK320's mounting plate is compatible with standard decorator-style, 1-gang junction boxes of the US, EU, and MK type; it is also compatible with [VK101](#) and [VK102](#) Tabletop Kits to support desk mounting and wall mounting to meet versatile installation needs. The uniform equilateral design is suitable for flexible placement in either horizontal or vertical orientation.

- 8" touch panel with narrow bezel modern design
- Natively installed with ATEN Control System app and designed for the integrated use with ATEN Control System
- Supports AppSwitcher to allow multiple apps to be switched and operated
- Integrated with [ATEN Unizon](#) and ATEN Room Booking system to display room usage and operating status
- Allows administrators for central control of multiple rooms via profiles
- Restricts user access to profiles via password authentication
- Synchronization of system control among multiple ATEN Touch Panels, mobile devices, and tablet computers
- Demo mode enables demonstration without connecting a controller while familiarizing users with the solution's most important functions
- Screen Saver helps energy saving and prolongs the device lifetime
- Allows for Display Real-time Streaming Protocol (RTSP), ONVIF, and ATEN VE89 series video preview*
- Supports Power over Ethernet (PoE), which allows it to receive power and data over a single Ethernet cable
- Side power LED – features the indicator in the dark place
- In-wall design – perfectly fits in building decoration
- Compatible with [VK101](#) and [VK102](#) Tabletop Kits for desk mounting and wall mounting

*Note: The function is applicable to [VK2200](#) / [VK1200](#).

Specification

Processor	Quad-core
Memory	
SDRAM	2GB
Flash	32GB
Panel Spec	
Display Type	IPS-LCD
Size	8"
Touch Screen	Capacitive
Resolution	1280 x 800
Aspect Ratio	16 : 10
Color Depth	8 bit
Contrast Ratio	800 : 1
Backlight	LCD
Viewing Angle	± 85° (H), ± 85° (V)
Luminance	300 cd/m ²
Interfaces	
Ethernet	1 x RJ-45 Female, 10 / 100 BaseT
USB	1 x USB Type C
Power Inputs	
Power over Ethernet (PoE)	802.3 at PoE+
Power Consumption	DC:12V:12W:40.95BTU/h POE:14.1W:48.1BTU/h Note: ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-10 – 55°C
Humidity	10 - 75% RH, Non-Condensing
Physical Properties	
Housing	Plastic
Weight	0.33 kg (0.73 lb)
Dimensions (L x W x H)	20.01 x 12.46 x 3.77 cm (7.88 x 4.91 x 1.48 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram



ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.