

VE200

VGA/Audio/RS-232 Cat 5 Extender with Dual Output (1280 x 1024@200m)



The VE200 Audio/Video Extender System allows you to extend the distance between the computer system unit and the display monitor by up to 200m/500ft for video resolutions of 1280x1024 @ 60Hz. It accomplishes this by means of a local transmitting unit (VE200L), and a remote receiving unit (VE200R), connected by Cat 5e twisted pair cable.

The VE200 Audio/Video Extender System is ideal for installations where the display needs to reside in public view, but the system equipment can be safely tucked away. The Extender System is also useful for control and security purposes, where you can have the system unit in a secure area while the display is located in an area that is convenient for viewing.

Other useful applications for the VE200 Audio/Video Extender System include:

- Finance: The remote display of stock market information.
- Education: The remote display of lectures and lessons to lecture halls and classrooms.
- Business: The remote display of addresses to overflow rooms; video conferencing; and demos.

Features

- Uses Cat 5e cable to connect the local and the remote units
- Dual Audio/video
- Supports one local and two remote displays
- Transmission distance up to 650 feet (200 m)*
- High-quality video – up to 1920x1200@60Hz at 100feet (30 m), 1600x1200@60Hz at 500 feet (150 m), 1280x1024@60Hz at 650 feet (200 m)
- Audio and serial enabled
- Two gain control modes for sharpest picture quality
- Video gain and compensation adjustable via OSD
- IR receiver for quick and easy video quality adjustment
- IR remote control for screen on/off and video adjustment at remote site
- Provides two RS-232 channels for selection
- Follows VESA FDMI mount standard
- Supports DDC for the local monitor
- Supports VGA, SVGA, XGA, SXGA, UXGA, WUXGA and multisync monitors

*1. When combined in an installation with ATEN's [VB552](#) (VGA Over Cat5 Repeater + Audio) can extend distance up to 450 m

2. VE200R can also be combined in an installation with the ATEN's Media Distribution Solution. For further details, please go to our website www.aten.com


Specification

Function	VE200L	VE200R
Video Input		
Interfaces	VE200L: 1 x HDB-15 Male (Blue)	N/A

Impedance	75 Ω	N/A
Max. Distance	1.8 m	N/A
Video Output		
Interfaces	1 x HDB-15 Female (Blue)	2 x HDB-15 Female (Blue)
Impedance	75 Ω	75 Ω
Video		
Max. Bandwidth	300 MHz	300 MHz
Max. Resolutions / Distance	Up to 1920 x 1200@30m; 1280 x 1024@200m	Up to 1920 x 1200@30m; 1280 x 1024@200m
Audio		
Input	1 x Mini Stereo Jack Female (Green)	N/A
Output	1 x Mini Stereo Jack Female (Green)	2 x Mini Stereo Jack Female (Green)
Control		
RS-232	1 x DB-9 Female (Black), 1 x DB-9 Male (Black)	2 x DB-9 Male (Black)
IR(VE200R)	N/A	1 x Mini Stereo Jack Female (Black)
Connectors		
Power	1 x DC Jack	1 x DC Jack
Power Consumption	DC5.3V:2.22W:10BTU/h Note: <ul style="list-style-type: none"> ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. 	DC5.3V:3.65W:17BTU/h Note: <ul style="list-style-type: none"> ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.
Environmental		
Operating Temperature	0-50°C	0-50°C
Storage Temperature	-20 - 60°C	-20 - 60°C
Humidity	0 - 80% RH, Non-Condensing	0 - 80% RH, Non-Condensing
Physical Properties		
Housing	Metal	Metal
Weight	0.35 kg (0.77 lb)	0.35 kg (0.77 lb)
Dimensions (L x W x H)	13.90 x 8.80 x 2.86 cm (5.47 x 3.46 x 1.13 in.)	13.90 x 8.80 x 2.86 cm (5.47 x 3.46 x 1.13 in.)

Carton Lot	5 pcs	5 pcs
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.	

Diagram

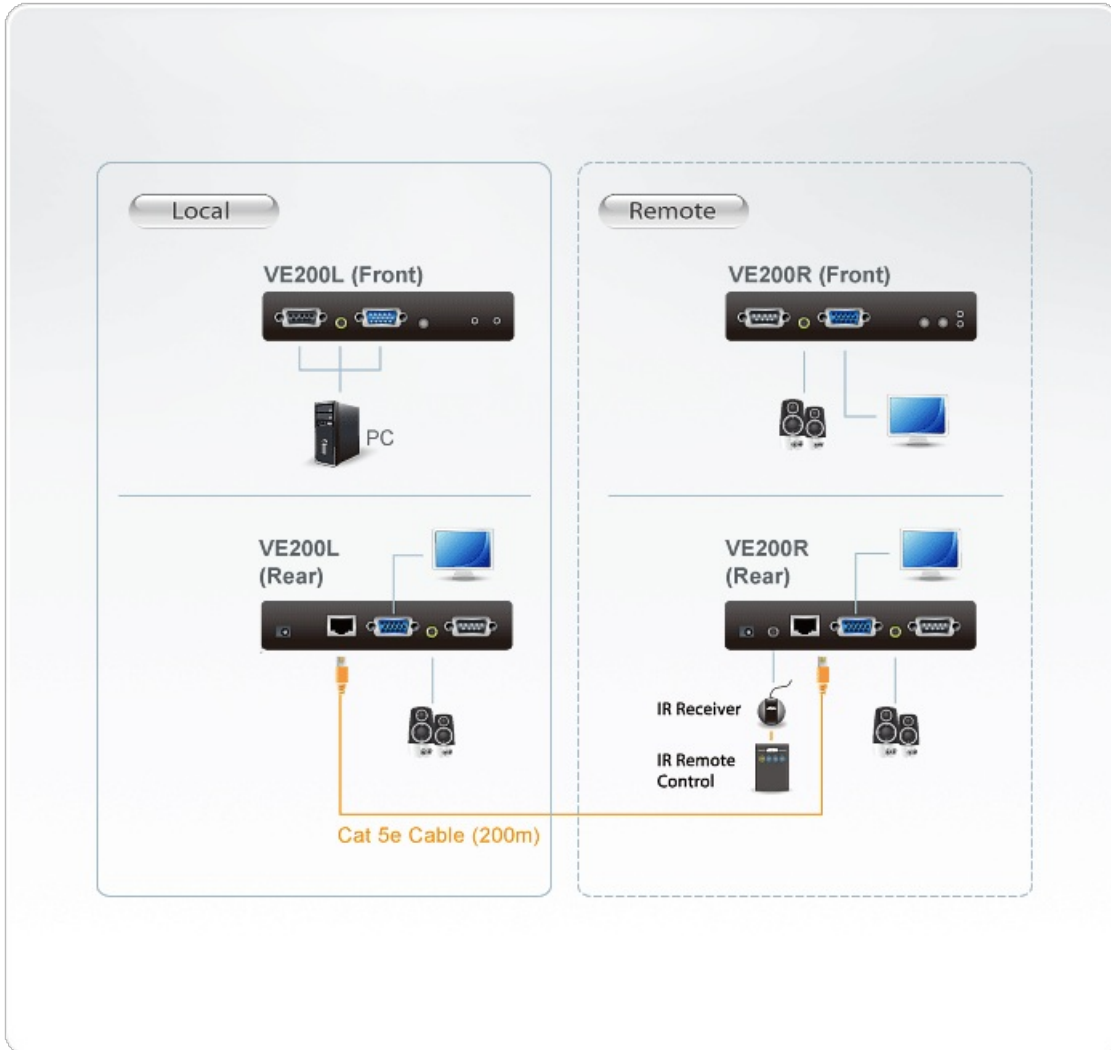

ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.