


UH3239

USB-C Multiport Mini Dock with Power Pass-Through



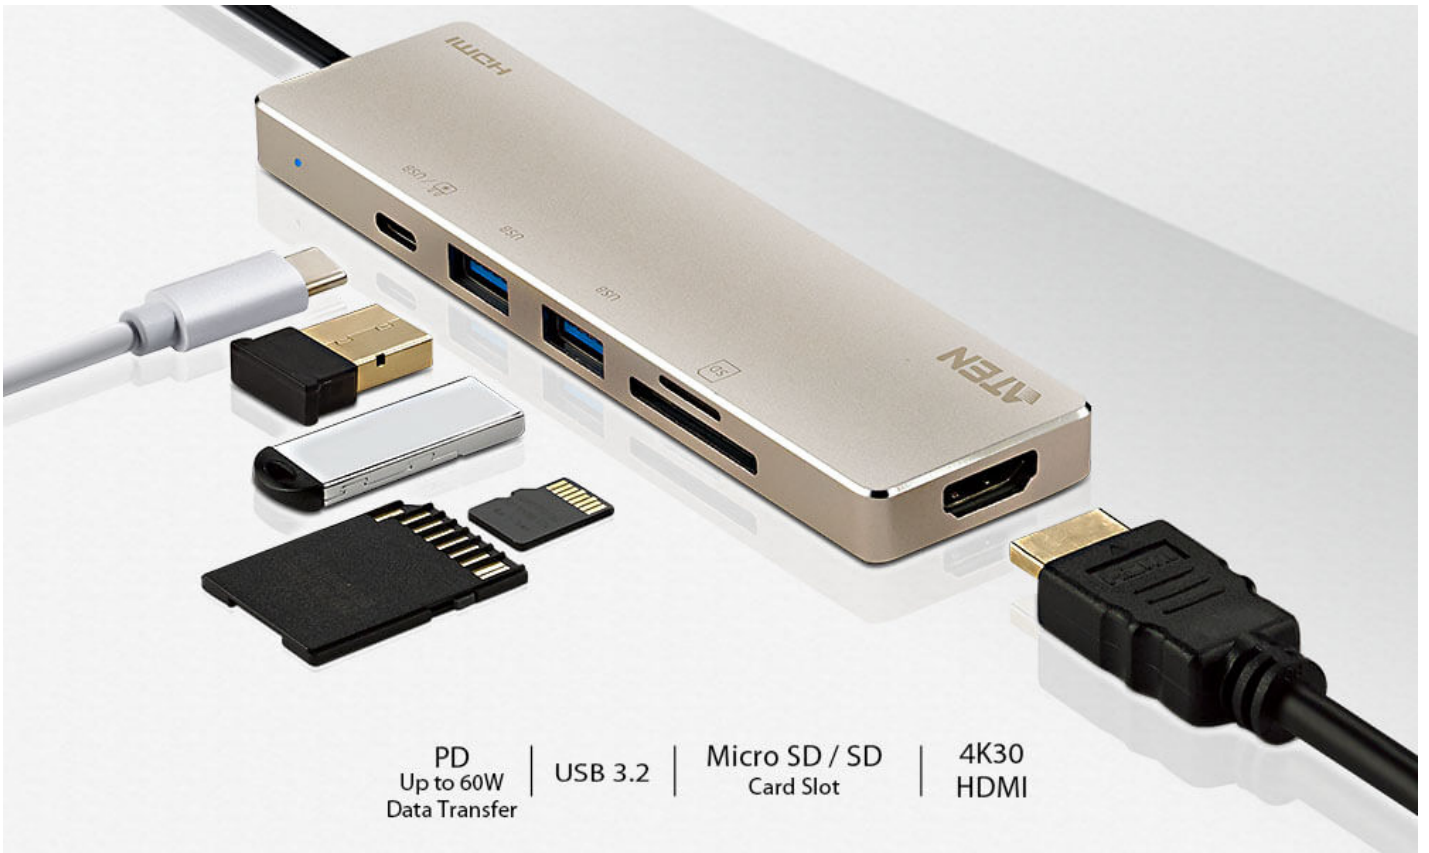

Lightweight, Compact Design with Ultra-Long USB-C Cable

Designed for maximum portability, the mini dock can easily fit into your bag or pocket, making it ideal to take with you on-the-go anywhere. The extended, built-in USB-C cable is 55cm long, suitable for any setup and situation with maximum convenience.

Hi-Res 4K@30Hz HDMI Display

Extend your viewing workspace with a single monitor for crystal-clear resolution, up to 4K@30Hz, for on-the-go presentations, conference calls, and video streaming.



Contact Us

Get a quote for this product or get in touch with our sales experts

[Get Quote](#)

[_Contact Sales](#)

**High-Speed 5Gbps Data Transfer**


High-speed 2 USB-A ports and USB-C 3.2 port are capable of 5Gbps transfer speeds for quickly synchronizing a complete music library or a photo album.

Type-C 60W PD and Data Transfer

The USB-C port supports up to 60W power delivery providing pass-through charging for your Windows laptop, MacBook, or iPad Pro, while also supporting standard 5Gbps data transfer.
*Power adapter not included.




One Dock for Massive Expansion

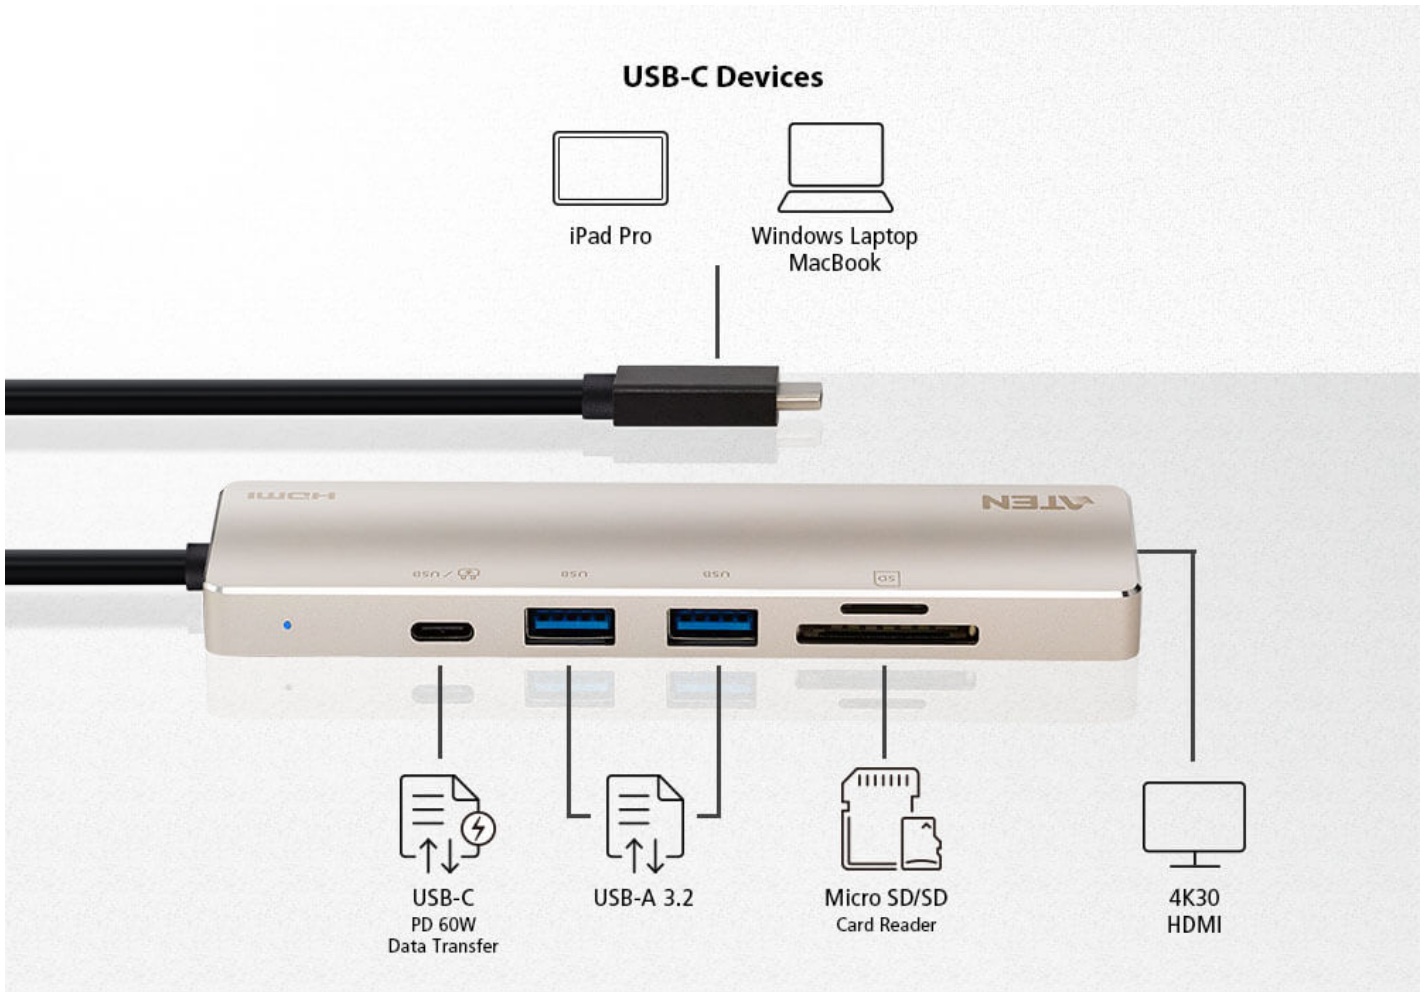

Talk to Our Experts

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly

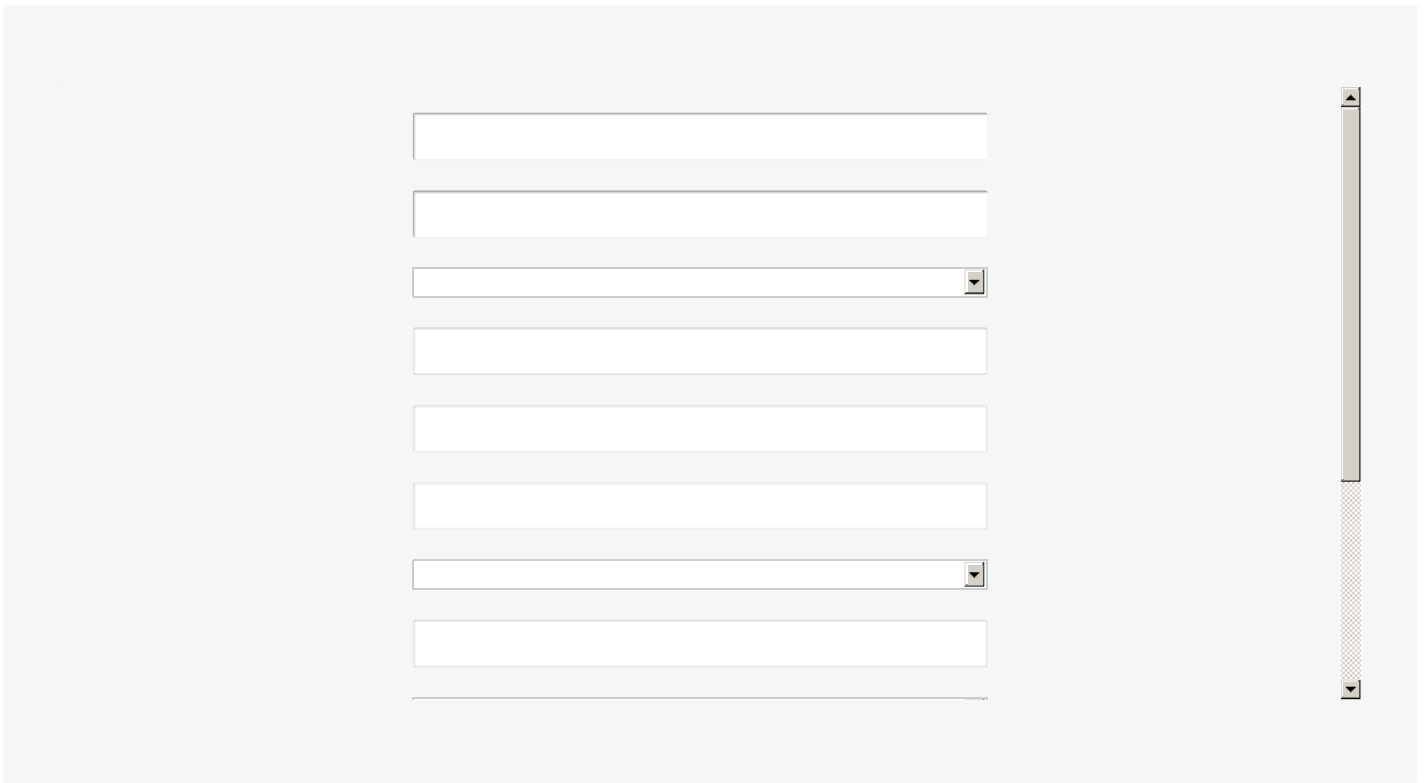

Features

The UH3239 USB-C Multiport Mini Dock with Power Pass-Through is a portable, versatile and flexible 6-in-1 adapter for USB-C PCs or laptops. The durable aluminum enclosure ships with dual USB 3.2 Type-A ports, a USB-C PD port, an HDMI port along with an SD card and a MicroSD card slots. It covers users' peripheral connectivity demands while allowing power delivery to the connected USB-C device. It supports resolutions up to 4K HDMI (3840 x 2160 @ 30Hz) to ensure that every detail of the video is displayed in the crisp and sharp UHD resolution on the 4K graphics-supported laptop. Besides, its 2 USB 3.2 Gen 1 Type-A ports guarantee effective communication with peripherals at a decent 5 Gbps transmission speed. Thanks to the USB-C PD port, the UH3239 can provide power or charge the external devices, and hence, there will be no more tangled data cables on the desk.


The UH3239 is a plug-and-play device compatible with all major operating systems (Windows®, macOS X and iPadOS). It is a compact, yet competent, data and power transmission solution for on-the-go professionals when it comes to building a mobile workstation ecosystem.

- 6-in-1 multi-function dock that includes 1x HDMI, 1x SD / Micro SD card reader, 1x USB-C PD port and 2x USB 3.2 Gen 1 Type-A ports
- Supports USB PD 2.0 for laptop charging up to 60W via USB-C PD power adapter – power profiles include 5V, 12V, 15V, 20V
- Supports resolutions up to 4K (3840 x 2160 @ 30Hz) for superior video distribution
- Plug and Play – no drivers needed
- Works with all major operating systems: Windows®, macOS X and iPadOS
- Compatible with Thunderbolt™ 3 (USB-C)
- Apple M1 chip compatible

Specification

| | |
|------------------------|---|
| Computer Connections | 1 |
| Cable Length | 55cm |
| Connectors | |
| Computer | USB 3.2 Gen1 Type-C Male Cable |
| Device | 2 x USB 3.2 Gen 1 Type-A female (Max. output 5V, 4.5W for each)* 1 x USB 3.2 Gen 1 Type-C female (Max. output 5V, 12W)* * 2 x USB-A and 1 x USB-C ports share total 5V, 12W when UH3239 powered by PC via USB-C. (@5V,3A bus-powered) |
| Power | 1 x USB Type-C Female (supports USB 3.2 Gen1 Type-C Port data transfer) Support Power Delivery 2.0 for laptop charging up to 60W, power profiles include 5V, 12V, 15V, 20V (additional USB-C power adapter needed) |
| Video Output | 1 x HDMI Female (Black) |
| Performance | |
| Flash Memory | Supports SD V1.0/ v1.1/ v2.0/ V3.01 and V5.0 SD (Capacity up to 2GB) SDHC (Capacity up to 32GB) SDXC (Capacity up to 2TB) |
| Video Resolution | 3840 x 2160@30Hz |
| Power Consumption | DC5V:15WBTU/h Note: ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. |
| System Requirements | Windows 10 or later, USB-C enabled computer with DP Alt Mode* * With Intel 7th-Generation Core Processor (Kaby-Lake) and above. More info about CPU generation, please find: https://www.intel.com/content/www/us/en/processors/processor-numbers.html Mac OS X 10.12 or later, USB-C enabled computer iPadOS 13.1 or later, iPad Pro (USB-C) |
| Environmental | |
| Operating Temperature | 0 – 40°C |
| Storage Temperature | -20 – 60°C |
| Humidity | 0 – 80% RH, Non-condensing |
| Physical Properties | |
| Housing | Aluminum |
| Weight | 0.07 kg (0.17 lb) |
| Dimensions (L x W x H) | 13.30 x 3.60 x 1.10 cm (5.24 x 1.42 x 0.43 in.) |
| Note | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |

Diagram

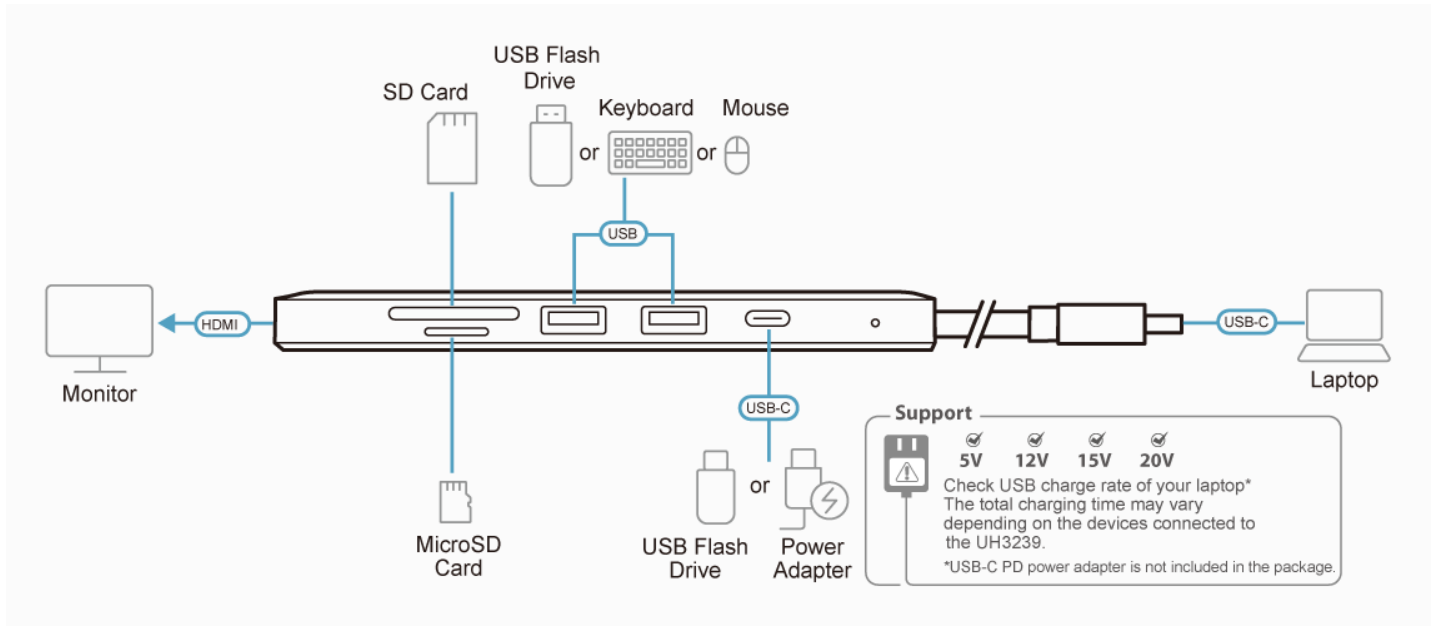

ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.